Fast recovery diode RF051UA1D

Applications


General rectification

● Features


- 1) Small power mold type. (TSMD6)
- 2) Very fast recovery.
- 3) High reliability

Construction

Silicon epitaxial planar

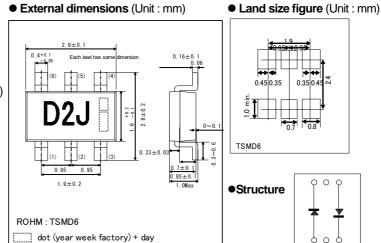

Taping specifications(Unit : mm)

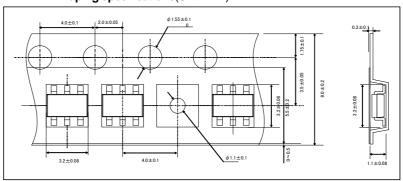

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit			
Reverse voltage (repatitive peak)	V_{RM}	100	V			
Reverse voltage (DC)	V_R	100	V			
Average rectified forward current (*1)	lo	0.5	А			
Forward current surge peak (60Hz-1cyc)	I _{FSM}	5	А			
Junction temperature	Tj	150	°C			
Storage temperature	Tstg	-55 to +150	°C			


^(*1) Rating for a per diode


●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Forward voltage	V_{F}	-	-	0.98	V	I _F =0.5A
Reverse current	I_R	-	-	10	μA	V _R =100V
Reverse recovery time	trr	-	-	25	ns	I _F =0.5A,I _R =1A,Irr=0.25*I _R



●Electrical characteristic curves (Ta=25°C) 100000 音声記 REVERSE CURRENTIR(nA) で の の FORWARD CURRENT:IF(A) CAPACITANCE BETWEEN TERMINAL S:Ct(pF) 0.1 0.00 20 40 60 80 100 0 0 200 400 600 800 1000 1200 0 FORWARD VOLTAGE: VF(mV) REVERSE VOLTAGE: VR(V) REVERSE VOLTAGE:VR(V) VF-IF CHARACTERISTICS 910 Ta=25°C 900 Ta=25°C FORWARD VOLTAGE:VF(mV) IF=0.5A VR=100V REVERSE CURRENT:IR(nA) 900 800 f=1MHz CAPACITANCE BETWEEN TERMINALS:Ct(pF) 700 n=10pcs 890 600 500 400 300 AVE:3.13pF 100 860 VF DISPERSION MAP IR DISPERSION MAP Ct DISPERSION MAP 1000 Ta=25°C IF=0.5A IR=1A RESERVE RECOVERY TIME:tm(ns) PEAK SURGE FORWARD CURRENT:IFSM(A) PEAK SURGE FORWARD CURRENT:IFSM(A) rr=0.25*IR 20 8.3ms 8.3ms 30 15 10 5 AVE:11.6A 10 100 trr DISPERSION MAP IFSM DISRESION MAP NUMBER OF CYCLES IFSM-CYCLE CHARACTERISTICS 1000 1000 Per chip TRANSIENT THAERMAL IMPEDANCE:Rth (°C/W) 0.8 DC PEAK SURGE FORWARD CURRENT:IFSM(A) D=1/2 100 100 FORWARD POWER DISSIPATION:Pf(W) 0.6 $Sin(\theta = 180)$ 0.4 10 0.2 0 10 TIME:t(ms) 1 1 TIME:t(s) 0 0.5 AVERAGE RECTIFIED Rth-t CHARACTERISTICS IFSM-t CHARACTERISTICS FORWARD CURRENT: Io(A) Io-Pf CHARACTERISTICS

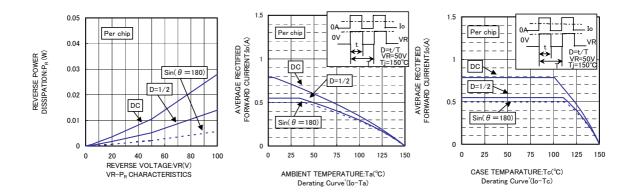



Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

