

#### Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <a href="http://www.nxp.com">http://www.nxp.com</a>, <a href="http://www.semiconductors.philips.com/">http://www.nxp.com</a>, <a href="http://www.nexperia.com/">http://www.nexperia.com/</a>, <a href="http://www.nexperia.com/">http://www.nexperia.com/</a>, <a href="http://www.nexperia.com/">use http://www.nexperia.com/</a>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

# 74HC1G08; 74HCT1G08

2-input AND gate Rev. 04 — 17 July 2007

**Product data sheet** 

#### **General description** 1.

74HC1G08 and 74HCT1G08 are high-speed, Si-gate CMOS devices. They provide a 2-input AND function.

The HC device has CMOS input switching levels and supply voltage range 2 V to 6 V.

The HCT device has TTL input switching levels and supply voltage range 4.5 V to 5.5 V.

The standard output currents are half those of the 74HC08 and 74HCT08.

#### 2. **Features**

- Symmetrical output impedance
- High noise immunity
- Low power dissipation
- Balanced propagation delays
- SOT353-1 and SOT753 package options

# **Ordering information**

Table 1. **Ordering information** 

Type number	Package							
	Temperature range	Name	Description	Version				
74HC1G08GW	–40 °C to +125 °C	TSSOP5	plastic thin shrink small outline package; 5 leads;	SOT353-1				
74HCT1G08GW			body width 1.25 mm					
74HC1G08GV	–40 °C to +125 °C	SC-74A	plastic surface-mounted package; 5 leads	SOT753				
74HCT1G08GV								

#### **Marking**


Table 2. **Marking codes** 

Type number	Marking
74HC1G08GW	HE
74HCT1G08GW	TE
74HC1G08GV	H08
74HCT1G08GV	T08




# 5. Functional diagram



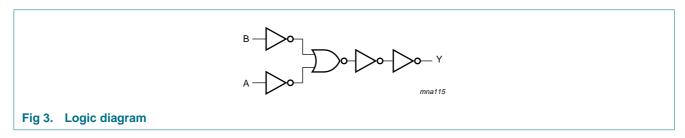

# 6. Pinning information

## 6.1 Pinning

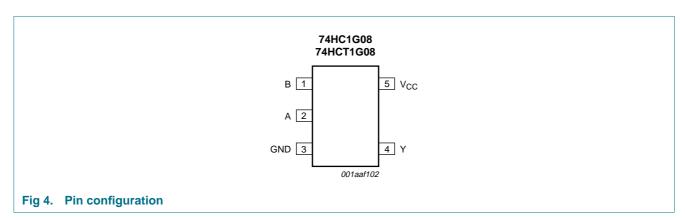

### 6.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
В	1	data input
A	2	data input
GND	3	ground (0 V)
Υ	4	data output
V <sub>CC</sub>	5	supply voltage

# 7. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level

Input		Output
Α	В	Υ
L	L	L
L	Н	L
Н	L	L
Н	Н	Н

# 8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V). [1]

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{CC}$	supply voltage		-0.5	+7.0	V
I <sub>IK</sub>	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I <sub>O</sub>	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±12.5	mA
I <sub>CC</sub>	supply current		-	25	mA
$I_{GND}$	ground current		-25	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40  ^{\circ}\text{C} \text{ to } +125  ^{\circ}\text{C}$	[2] _	200	mW

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 9. Recommended operating conditions

Table 6. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	ymbol Parameter Conditions		74HC1G08			74HCT1G08			Unit
			Min	Тур	Max	Min	Тур	Max	
$V_{CC}$	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
$V_{I}$	input voltage		0	-	$V_{CC}$	0	-	$V_{CC}$	V
$V_{O}$	output voltage		0	-	$V_{CC}$	0	-	$V_{CC}$	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C
$\Delta t/\Delta V$	input transition rise	$V_{CC} = 2.0 \text{ V}$	-	-	625	-	-	-	ns/V
	and fall rate	$V_{CC} = 4.5 \text{ V}$	-	-	139	-	-	139	ns/V
		$V_{CC} = 6.0 \text{ V}$	-	-	83	-	-	-	ns/V

<sup>[2]</sup> Above 55  $^{\circ}\text{C}$  the value of P  $_{tot}$  derates linearly with 2.5 mW/K.

# 10. Static characteristics

Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T<sub>amb</sub> = 25 °C.

Symbol	Parameter	Conditions	-40	°C to +8	35 °C	–40 °C t	o +125 °C	Unit
			Min	Тур	Max	Min	Max	
For type	74HC1G08			'		•		
$V_{IH}$	HIGH-level input	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	V
	voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	V
$V_{IL}$	LOW-level input	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	V
	voltage	V <sub>CC</sub> = 4.5 V	-	2.1	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	V
$V_{OH}$	HIGH-level output	$V_I = V_{IH}$ or $V_{IL}$						
	voltage	$I_{O} = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	V
		$I_{O} = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	V
		$I_{O} = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	V
		$I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	4.13	4.32	-	3.7	-	V
		$I_{O} = -2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.63	5.81	-	5.2	-	V
$V_{OL}$	LOW-level output	$V_I = V_{IH}$ or $V_{IL}$						
	voltage	$I_O = 20 \mu A$ ; $V_{CC} = 2.0 \text{ V}$	-	0	0.1	-	0.1	V
		$I_O = 20 \mu A$ ; $V_{CC} = 4.5 \text{ V}$	-	0	0.1	-	0.1	V
		$I_O = 20 \mu A$ ; $V_{CC} = 6.0 \text{ V}$	-	0	0.1	-	0.1	V
		$I_O = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V
		$I_{O} = 2.6 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	1.0	-	1.0	μΑ
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	10	-	20	μΑ
Cı	input capacitance		-	1.5	-	-	-	pF
For type	74HCT1G08							
V <sub>IH</sub>	HIGH-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	2.0	1.6	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	-	1.2	8.0	-	8.0	V
V <sub>OH</sub>	HIGH-level output	$V_I = V_{IH}$ or $V_{IL}$						
	voltage	$I_{O} = -20 \mu A$ ; $V_{CC} = 4.5 \text{ V}$	4.4	4.5	-	4.4	-	V
		$I_{O} = -2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	4.13	4.32	-	3.7	-	V
V <sub>OL</sub>	LOW-level output	$V_I = V_{IH}$ or $V_{IL}$						
	voltage	$I_O = 20 \mu A$ ; $V_{CC} = 4.5 \text{ V}$	-	0	0.1	-	0.1	V
		$I_{O} = 2.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	1.0	-	1.0	μΑ

Table 7. Static characteristics ... continued

Voltages are referenced to GND (ground = 0 V). All typical values are measured at  $T_{amb}$  = 25 °C.

Symbol Parameter		Conditions	–40 °C to +85 °C			–40 °C t	Unit	
			Min	Тур	Max	Min	Max	
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	10	-	20	μΑ
$\Delta I_{CC}$	additional supply current	per input; $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V};$ $V_I = V_{CC} - 2.1 \text{ V};$ $I_O = 0 \text{ A}$	-	-	500	-	850	μΑ
C <sub>I</sub>	input capacitance		-	1.5	-	-	-	pF

# 11. Dynamic characteristics

#### Table 8. Dynamic characteristics

GND = 0 V;  $t_r = t_f \le 6.0$  ns; All typical values are measured at  $T_{amb} = 25$  °C. For test circuit see Figure 6

Symbol	Parameter	Conditions		-40	°C to +8	5 °C	-40 °C t	Unit	
				Min	Тур	Max	Min	Max	
For type	74HC1G08					'		1	
t <sub>pd</sub>	propagation delay	A and B to Y; see Figure 5	<u>[1]</u>						
		$V_{CC} = 2.0 \text{ V}; C_L = 50 \text{ pF}$		-	25	115	-	135	ns
		$V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$		-	9	23	-	27	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	7	-	-	-	ns
		$V_{CC} = 6.0 \text{ V}; C_L = 50 \text{ pF}$		-	8	20	-	23	ns
$C_{PD}$	power dissipation capacitance	$V_I = GND \text{ to } V_{CC}$	[2]	-	19	-	-	-	pF
For type	74HCT1G08								
t <sub>pd</sub>	propagation delay	A and B to Y; see Figure 5	<u>[1]</u>						
		$V_{CC} = 4.5 \text{ V}; C_L = 50 \text{ pF}$		-	11	23	-	27	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	11	-	-	-	ns
$C_{PD}$	power dissipation capacitance	$V_I = GND \text{ to } V_{CC} - 1.5 \text{ V}$	[2]	-	21	-	-	-	pF

<sup>[1]</sup>  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$  where:

 $f_i$  = input frequency in MHz

f<sub>o</sub> = output frequency in MHz


C<sub>L</sub> = output load capacitance in pF

 $V_{CC}$  = supply voltage in Volts

 $\sum (C_L \times V_{CC}^2 \times f_o) = \text{sum of outputs}$ 


<sup>[2]</sup>  $\,$   $\,$   $\,$   $\,$   $\,$   $\,$   $\,$   $\,$  C<sub>PD</sub> is used to determine the dynamic power dissipation P<sub>D</sub> ( $\mu$ W).

### 12. Waveforms



For 74HC1G08:  $V_M$  = 0.5 ×  $V_{CC}$ ;  $V_I$  = GND to  $V_{CC}$ For 74HC11G08:  $V_M$  = 1.3 V;  $V_I$  = GND to 3.0 V

Fig 5. The input (A and B) to output (Y) propagation delays



Test data is given in <u>Table 8</u>. Definitions for test circuit:

 $C_L$  = Load capacitance including jig and probe capacitance


 $R_T = \mbox{Termination resistance}$  should be equal to the output impedance  $Z_o$  of the pulse generator

Fig 6. Load circuitry for switching times

# 13. Package outline

TSSOP5: plastic thin shrink small outline package; 5 leads; body width 1.25 mm

SOT353-1

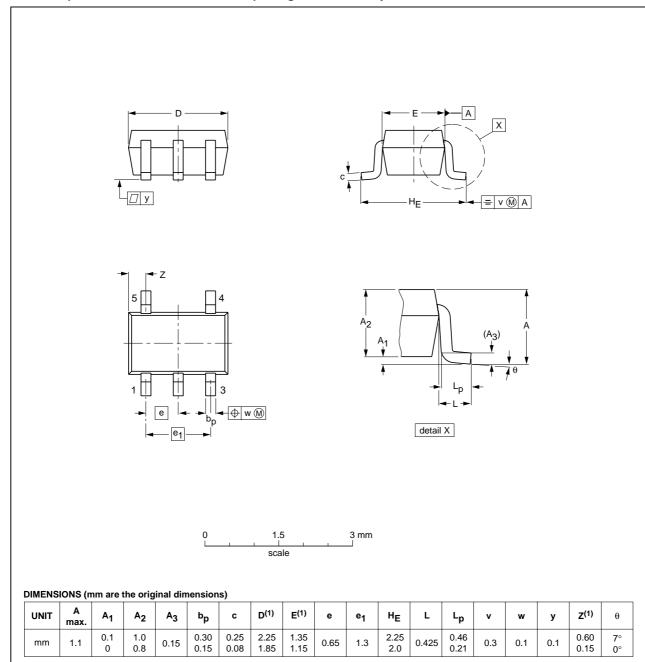

#### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	REFERENCES		EUROPEAN	ISSUE DATE	
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT353-1		MO-203	SC-88A			<del>00-09-01</del> 03-02-19	

Fig 7. Package outline SOT353-1 (TSSOP5)

#### Plastic surface-mounted package; 5 leads

**SOT753** 

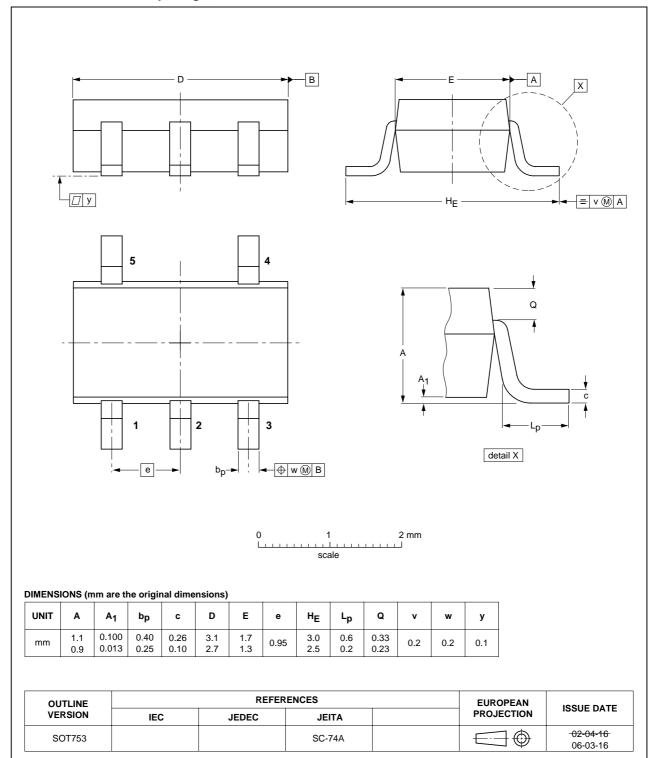


Fig 8. Package outline SOT753 (SC-74A)

# 14. Abbreviations

#### Table 9. Abbreviations

Acronym	Description
DUT	Device Under Test
TTL	Transistor-Transistor Logic

# 15. Revision history

#### Table 10. Revision history

717 Product dather format of this data should lines of NXP Semic egal texts have been ad	heet has been rede conductors.		·
uidelines of NXP Semic	onductors.		·
egal texts have been ad	lapted to the new co	omnany name where	. onnronrioto
		Jinpany name where	з арргорпате.
ackage SOT353 change	ed to SOT353-1 in	Table 1 and Figure 7	•
uick Reference Data ar	nd Soldering section	ns removed.	
ection 2 "Features" upd	ated.		
517 Product sp	ecification	-	74HC_HCT1G08_2
302 Product sp	ecification	-	74HC_HCT1G08_1
110 Preliminary	y specification	-	-
)	euick Reference Data ar ection 2 "Features" upd 1517 Product sp 1302 Product sp	euick Reference Data and Soldering section ection 2 "Features" updated.  Product specification  Product specification	Product specification - Product specification -

### 16. Legal information

#### 16.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nxp.com">http://www.nxp.com</a>.

#### 16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

#### 16.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

#### 16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

#### 17. Contact information

For additional information, please visit: http://www.nxp.com

For sales office addresses, send an email to: <a href="mailto:salesaddresses@nxp.com">salesaddresses@nxp.com</a>

#### 18. Contents

1	General description
2	Features
3	Ordering information
4	Marking 1
5	Functional diagram
6	Pinning information
6.1	Pinning
6.2	Pin description
7	Functional description
8	Limiting values
9	Recommended operating conditions
10	Static characteristics
11	Dynamic characteristics
12	Waveforms
13	Package outline
14	Abbreviations
15	Revision history
16	Legal information
16.1	Data sheet status
16.2	Definitions
16.3	Disclaimers
16.4	Trademarks10
17	Contact information
18	Contents 11

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

