

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



September 1983 Revised February 1999

MM74HC138 3-to-8 Line Decoder

General Description

The MM74HC138 decoder utilizes advanced silicon-gate CMOS technology and is well suited to memory address decoding or data routing applications. The circuit features high noise immunity and low power consumption usually associated with CMOS circuitry, yet has speeds comparable to low power Schottky TTL logic.

The MM74HC138 has 3 binary select inputs (A, B, and C). If the device is enabled, these inputs determine which one of the eight normally HIGH outputs will go LOW. Two active LOW and one active HIGH enables (G1, $\overline{\text{G2A}}$ and $\overline{\text{G2B}}$) are provided to ease the cascading of decoders.

The decoder's outputs can drive 10 low power Schottky TTL equivalent loads, and are functionally and pin equivalent to the 74LS138. All inputs are protected from damage due to static discharge by diodes to $\rm V_{CC}$ and ground.

Features

- Typical propagation delay: 20 ns
- Wide power supply range: 2V-6V
- Low quiescent current: 80 µA maximum (74HC Series)
- Low input current: 1 µA maximum
- Fanout of 10 LS-TTL loads


Ordering Code:

Order Number	Package Number	Package Description
MM74HC138M	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
MM74HC138SJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
MM74HC138MTC	MTC16	16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
MM74HC138N	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

Connection Diagram

Pin Assignment for DIP, SOIC, SOP and TSSOP




Truth Table

Inputs						Out	puts					
Enable			Select									
G1	G2 (Note 1)	С	В	Α	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
Х	Н	Х	Х	Х	Н	Н	Н	Н	Н	Н	Н	Н
L	Χ	Х	Χ	Χ	Н	Н	Н	Н	Н	Н	Н	Н
Н	L	L	L	L	L	Н	Н	Н	Н	Н	Н	Н
Н	L	L	L	Н	Н	L	Н	Н	Н	Н	Н	Н
Н	L	L	Н	L	Н	Н	L	Н	Н	Н	Н	Н
Н	L	L	Н	Н	Н	Н	Н	L	Н	Н	Н	Н
Н	L	Н	L	L	Н	Н	Н	Н	L	Н	Н	Н
Н	L	Н	L	Н	Н	Н	Н	Н	Н	L	Н	Н
Н	L	Н	Н	L	Н	Н	Н	Н	Н	Н	L	Н
Н	L	Н	Н	Н	Н	Н	Н	Н	Н	Н	Н	L

H = HIGH Level, L = LOW Level, X = don't care

Note 1: $\overline{G2}$ = G2A+G2B

Logic Diagram

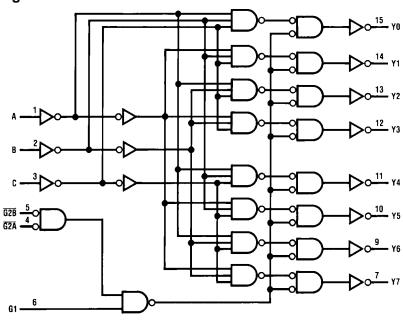

Absolute Maximum Ratings(Note 2)

(Note 3)

Supply Voltage (V _{CC})	-0.5 to + 7.0 V
DC Input Voltage (V _{IN})	$-$ 1.5 to V_{CC} + 1.5 V
DC Output Voltage (V _{OUT})	-0.5 to $V_{CC} + 0.5 V$
Clamp Diode Current (I _{IK} , I _{OK})	\pm 20 mA
DC Output Current, per pin (I _{OUT})	\pm 25 mA
DC V _{CC} or GND Current, per pin (I _{CC})	\pm 50 mA
Storage Temperature Range (T _{STG})	$-65^{\circ}\text{C} \text{ to} + 150^{\circ}\text{C}$
Power Dissipation (P _D)	
(Note 4)	600 mW
S.O. Package only	500 mW
Lead Temperature (T _L)	

Recommended Operating Conditions

	Min	Max	Units
Supply Voltage (V _{CC})	2	6	V
DC Input or Output Voltage	0	V_{CC}	V
(V_{IN}, V_{OUT})			
Operating Temperature Range (T _A)	-40	+85	°C
Input Rise or Fall Times			
$(t_r, t_f) V_{CC} = 2.0V$		1000	ns
$V_{CC} = 4.5V$		500	ns
$V_{CC} = 6.0V$		400	ns
Note 2: Absolute Maximum Ratings are those	values	beyond wh	ich dam-

Note 2: Absolute Maximum Ratings are those values beyond which damage to the device may occur.

Note 3: Unless otherwise specified all voltages are referenced to ground.

Note 4: Power Dissipation temperature derating — plastic "N" package: –
12 mW/°C from 65°C to 85°C.

DC Electrical Characteristics (Note 5)

(Soldering 10 seconds)

Symbol	Parameter	Conditions	V _{CC}	T _A =	25°C	T _A = -40 to 85°C	Units
Symbol	raiametei	Conditions	*CC	Тур	Guar	T _A = -40 to 85°C ranteed Limits 1.5 3.15 4.2 0.5 1.35 1.8 1.9 4.4 5.9 3.84 5.34 0.1 0.1 0.1 0.1 0.33 0.33 ±1.0	Offics
V _{IH}	Minimum HIGH Level		2.0V		1.5	1.5	V
	Input Voltage		4.5V		3.15	3.15	V
			6.0V		4.2	4.2	V
V_{IL}	Maximum LOW Level		2.0V		0.5	0.5	V
	Input Voltage		4.5V		1.35	1.35	V
			6.0V		1.8	1.8	V
V_{OH}	Minimum HIGH Level	$V_{IN} = V_{IH}$ or V_{IL}					
	Output Voltage	I _{OUT} ≤ 20 μA	2.0V	2.0	1.9	1.9	V
			4.5V	4.5	4.4	4.4	V
			6.0V	6.0	5.9	5.9	V
		$V_{IN} = V_{IH}$ or V_{IL}					
		I _{OUT} ≤ 4.0 mA	4.5V	4.2	3.98	3.84	V
		I _{OUT} ≤ 5.2 mA	6.0V	5.7	5.48	5.34	V
V _{OL}	Maximum LOW Level	$V_{IN} = V_{IH}$ or V_{IL}					
	Output Voltage	I _{OUT} ≤ 20 μA	2.0V	0	0.1	0.1	V
			4.5V	0	0.1	0.1	V
			6.0V	0	0.1	0.1	V
		$V_{IN} = V_{IH}$ or V_{IL}					
		I _{OUT} ≤ 4.0 mA	4.5V	0.2	0.26	0.33	V
		I _{OUT} ≤ 5.2 mA	6.0V	0.2	0.26	0.33	V
I _{IN}	Maximum Input	V _{IN} = V _{CC} or GND	6.0V		±0.1	±1.0	μΑ
	Current						
I _{CC}	Maximum Quiescent	V _{IN} = V _{CC} or GND	6.0V		8.0	80	μΑ
	Supply Current	$I_{OUT} = 0 \mu A$					

Note 5: For a power supply of 5V \pm 10% the worst case output voltages (V_{OH}, and V_{OL}) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V_{IH} and V_{IL} occur at V_{CC} = 5.5V and 4.5V respectively. (The V_{IH} value at 5.5V is 3.85V.) The worst case leakage current (I_{IN}, I_{CC}, and I_{OZ}) occur for CMOS at the higher voltage and so the 6.0V values should be used.

AC Electrical Characteristics $V_{CC} = 5V$, $T_A = 25$ °C, $C_L = 15$ pF, $t_r = t_f = 6$ ns


Symbol	Parameter	Conditions	Тур	Guaranteed Limit	Units
t _{PLH}	Maximum Propagation		18	25	ns
	Delay, Binary Select to any Output				
t _{PHL}	Maximum Propagation		28	35	ns
	Delay, Binary Select to any Output				
t _{PHL} , t _{PLH}	Maximum Propagation		18	25	ns
THE TEN	Delay, G1 to any Output				
t _{PHL}	Maximum Propagation		23	30	ns
	Delay G2A or G2B to				
	Output				
t _{PLH}	Maximum Propagation		18	25	ns
	Delay G2A or G2B to Output				

AC Electrical Characteristics

 $C_L = 50 \; \text{pF}, \; t_f = t_f = 6 \; \text{ns}$ (unless otherwise specified)


Symbol	Parameter	Conditions	V _{CC}	T _A = 25°C		T _A = -40 to 85°C	Units
Symbol	Farameter	Conditions	VCC	Тур	Gua	T _A = -40 to 85°C ranteed Limits 189 38 32 252 50 43 189 38 32 221 44 37 189 38 32 221 44 37 189 38 32 95 19 16 10	Ullits
t _{PLH}	Maximum Propagation		2.0V	75	150	189	ns
	Delay Binary Select to		4.5V	15	30	38	ns
	any Output LOW-to-HIGH		6.0V	13	26	32	ns
t _{PHL}	Maximum Propagation		2.0V	100	200	252	ns
	Delay Binary Select to any		4.5V	20	40	50	ns
	Output HIGH-to-LOW		6.0V	17	34	43	ns
t _{PHL} , t _{PLH}	Maximum Propagation		2.0V	75	150	189	ns
	Delay G1 to any		4.5V	15	30	38	ns
	Output		6.0V	13	26	32	ns
t _{PHL}	Maximum Propagation		2.0V	82	175	221	ns
	Delay G2A or G2B to		4.5V	28	35	44	ns
	Output		6.0V	22	30	37	ns
t _{PLH}	Maximum Propagation		2.0V	75	150	189	ns
	Delay G2A or G2B to		4.5V	15	30	38	ns
	Output		6.0V	13	26	32	ns
t _{TLH} , t _{THL}	Output Rise and		2.0V	30	75	95	ns
	Fall Time		4.5V	8	15	19	ns
			6.0V	7	13	16	ns
C _{IN}	Maximum Input			3	10	10	pF
	Capacitance						
C _{PD}	Power Dissipation	(Note 6)		75			pF
	Capacitance						

Note 6: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} \ V_{CC}^2 f + I_{CC} \ V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} \ V_{CC} f + I_{CC}$.

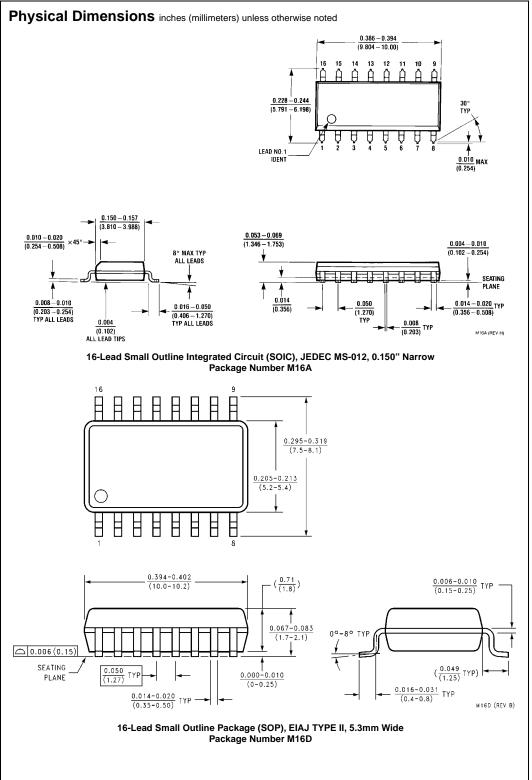

Physical Dimensions inches (millimeters) unless otherwise noted (Continued) 7.72 TYP. DIMENSIONS METRIC ONLY (1.78 TYP) 0.42 TYP LAND PATTERN RECOMMENDATION GAGE PLANE 6.4 0.25 4.4 ± 0.1 -B-3.2 SEATING PLANE 0.6 ± 0.1 DETAIL A △ 0.2 C B A ALL LEAD TIPS TYPICAL, SCALE: 40X SEE DETAIL A PIN #1 IDENT. (0.90) O.1 C--c-0.10 ± 0.05 TYP 0.09-0.20 TYP 0.65 TYP - 0.30 TYP Φ 0.13 M B (S) Α MTC16 (REV C)

16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC16

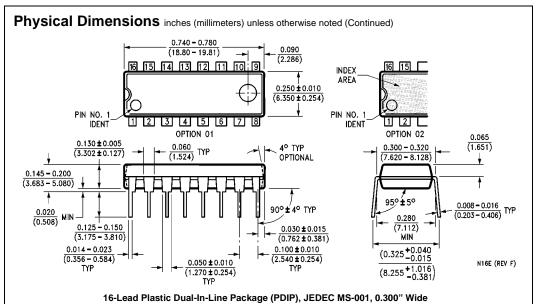

Package Number N16E

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative