

Plug-in current transformer; Primary rated current: 200 A; Secondary rated current: 5 A; Rated power: 2.5 VA; Accuracy class: 0.5; for billing purposes



www.wago.com/855-405/200-209

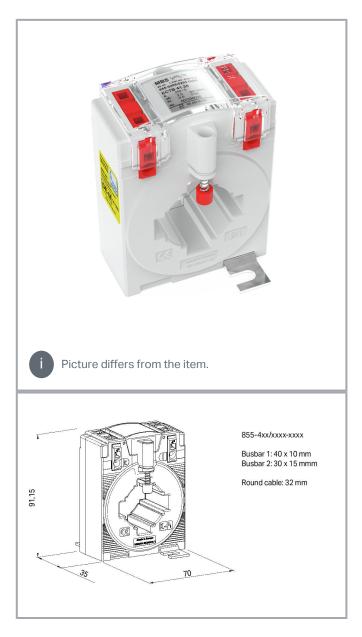

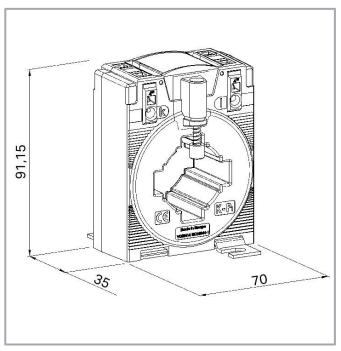

Item description

Short description:

WAGO's plug-in current transformers for billing measurement (855 Series) are inductive, single-conductor current transformers. Due to the measurement principle used, these current transformers are exclusively designed for AC network applications.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-405/200-209



These plug-in current transformers comply with the conformity assessment procedure (module D) and can be used for billing. Features:

- Screwless CAGE CLAMP® connection technology
- Several mounting options available
- Vibration- and shock-resistant
- High mechanical retention forces
- High current-carrying capacity
- Continuous overload of 120% the nominal primary current
- Low-voltage current transformer for operating voltages up to max. 1.2 kV
- For 690 V power networks
- Accessories: 879-3040; Energy Meter; with Push-in CAGE CLAMP and lever; transformer connection (2PUCT)

Data

Technical data

Input Current Transformers

Primary rated current	200 A
Rated continuous thermal current I cth	AC 1.2 x I _N
Rated short-time thermal current I _{th}	60 x I _N / 1 s (max. 100 kA / 1 s)
Overcurrent limiting factor	FS5 / FS10 (type dependent; see type plate inscription)
Rated frequency	50 60 Hz

Output (current transformer)

Secondary rated current	5 A
Rated power S _r	2.5 VA

Measurement Error

Accuracy class	0.5	

Safety and protection

Highest voltage for equipment \mathbf{U}_{m}	AC 1.2 kV $_{\rm rms}$	
---	------------------------	--

Test voltage

Test voltage	AC 6 kV; 50 Hz; 1 min

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Do you have any questions about our products?

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-405/200-209



Connection data

CAGE CLAMP®
0.08 4 mm² / 28 12 AWG
0.08 4 mm² / 28 12 AWG
9 10 mm / 0.35 0.39 inches

Physical data

Width	70 mm / 2.756 inches
Height	91.15 mm / 3.589 inches
Depth	52 mm / 2.047 inches

Mechanical Data

Mounting type	Installation on round cable
	Closed current transformer
	Installation on mounting plate
	Mounting on DIN-rail via DIN-rail adapter
	Mounting on round cable

Material Data

Insulation class	E
Weight	259 g

Environmental requirements

Ambient temperature (operation)	-5 +50 °C
Ambient temperature (storage)	-25 +70 ℃
Operating altitude (max.)	1000 m

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61869-1
	EN 61869-2

Commercial data

ETIM 8.0	EC002048
ETIM 7.0	EC002048

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-405/200-209



PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4066966094497
Customs tariff number	85043129900

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
EHE	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011,TP TC 020/2011	EAC RU C- DE.AM02. B.00111 /19
Declarations	of conformity and manufacturer's declarations		0

			Certificate
Logo	Approval	Additional Approval Text	name
	EU-Declaration of Conformity	-	-
	WAGO GmbH & Co. KG		



Optional accessories

Mounting	adapter
wiouriting	aaaptoi

Fast connection adapter



Item no.: 855-9910 Quick-mount kit

www.wago.com/855-9910

DIN-rail adapter



Item no.: 855-9900 Carrier rail adapter

www.wago.com/855-9900

Signal conditioner

Power measurement module

Item no.: 2857-570/024-005

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-405/200-209





3-Phase Power Measurement Module; 3x277/480 V/5 A; Modbus RTU; Digital output; Configuration via www.wago.com/2857-570 software; Supply voltage: 24 VDC

/024-005

Item no.: 857-550

Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

www.wago.com/857-550

Item no.: 857-569

Power signal conditioner; Current and voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width

www.wago.com/857-569

Item no.: 857-551

Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width

www.wago.com/857-551

Energy meter

Item no.: 879-3040

Energy meter (MID); for transformer connection; 1 A / 5 A; 3x230/400V; 50Hz; Modbus® and M-Bus; 2 x www.wago.com/879-3040

S0 interface; 2PU CT

Tool

Operating tool



Item no.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Downloads Documentation

Bid Text

855-405/200-209 doc - Datei	2020 Oct 5	docx 18.0 kB	Download
855-405/200-209	2020 Oct 5	xml	Download
X81 - Datei		6.2 kB	

Instruction Leaflet

Aufsteck-Stromwandler	pdf	Download
	1.5 MB	

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.



Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 855-405/200-209

URL

Plug-in current transformer; Primary rated current: 200 A; Secondary rated current: 5

A; Rated power: 2.5 VA; Accuracy class: 0.5; for billing purposes

Installation Notes

Conductor termination



Conductor termination – screwdriver actuation perpendicular to conductor entry



Conductor termination – screwdriver actuation parallel to conductor entry

Installation



Installation on copper current bar



Installation on round cable

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-405/200-209





Installation on mounting plate



Mounting on DIN-rail via 855-9900 DIN-Rail Adapter



Installation via 855-9910 Quick-Mount Kit

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.