Features

LED DRIVER

- 70W Buck LED Driver
- Constant Current Output (350 to 1200mA)
- Digital PWM and Analogue Voltage Dimming
- High Efficiency to 96%
- EN, UL and RAILWAYS Certified
- Metal or Plastic Case Version
- IP67 Rated for /W, Plastic Case Version

Description

The RCD-48 series is a step-down constant current source designed for driving high power LED applications. Four output currents are available. The maximum output voltage is 56V. The buck drivers have digital PWM and/or analogue voltage dimming control and are special featured with very high efficiency. Typical applications are 48V bus lighting solutions or high voltage LED arrays (e.g. high bay lights).

Part Number	Input Range (VDC)	Output Current (mA)	Output Voltage (VDC)	Dimming Control	Efficiency Typ. (%)
RCD-48-0.35*	9-60	0-350	2-56	Digital + Analogue	96
RCD-48-0.50*	9-60	0-500	2-56	Digital + Analogue	96
RCD-48-0.70*	9-60	0-700	2-56	Digital + Analogue	96
RCD-48-1.00*	9-60	0-1000	2-56	Digital + Analogue	96
RCD-48-1.20/M	9-60	0-1200	2-56	Digital + Analogue	96

^{*}add suffix "/W" for wired version with Vref output and analogue + PWM dimming control (seven wires)

Note: Add suffix "/M" for metal case (RCD-48-1.20/M only). No metal case with wires available.

Standard version (no suffix) and wired version (suffix /W) only in plastic case.

Specifications (typical at 25°C, nominal input voltage, rated output current unless otherwise specified)					
Operating Input Voltage Range		9-60VDC			
Absolute Maximum Input Voltage		65VDC max.			
Output LED String Voltage Range		2V min. / 56V max.			
(depand on the input voltage, defined by	y the output impedance, see Safe Operating A	Area)			
Input Filter		Capacitor			
Output Current Accuracy		±3% typ. / ±5% max.			
Internal Power Dissipation	350mA	0.8W typ.			
(Vin=60V, Vout=56V)	500mA	1.0W typ.			
	700mA	1.1W typ.			
	1000mA	1.3W typ.			
	1200mA	1.4W typ.			
Output Current Stability	Vin=60V, Vout=2-56V, lout=350-1200mA	±1% max.			
Output Ripple and Noise (20MHz BW)	Vin=60V, Vout=2-56V, lout=350-1200mA	300mVp-p max.			
Maximum Capacitive Load		100μF max.			
Switching Frequency	50k	Hz min. / 1000kHz max.			

ET	ticiency at Full Load
P۱	WM DIMMING CONTROL & REMOTE ON/OFF CONTROL
In	nut Voltago Pango

Input Voltage Range		5V typ. / 10V max.
Threshold Voltage	Device ON	0.5V max.
	Device OFF	2.0V min.
PWM Frequency	For Linear Operation	200Hz max.
	Frequency Limit	1000Hz max

ANALOGUE DIMMING CONTROL (Leave open if not used - do not tie to +Vin)

Input Voltage Range 0V min. / 10V max. Control Voltage Range 0V min. / 5.1V max.

Note: The analogue dimming range is from 0% to 100%, but the output can be unstable below 10%, when using the analo-

gue dimming function.		
Analogue Pin Drive Current	Vc=5V	0.2mA max.
Vref Version	Vref Voltage	5V -5%/+10%
	Vref Output Current	0.15mA max.
	Vref Output Short Circuit Current	2mA typ.
Ambient Temperature	350mA	-40°C to +80°C
(free air convection)	500mA	-40°C to +80°C
	700mA	-40°C to +75°C
	1000mA	-40°C to +60°C
	1200mA	-40°C to +50°C

Analogue and PWM Dimming Control Note: Leave open if not used - do not tie to +Vin

continued on next page

96% typ.

LIGHTLINE

DC/DC-Converter with 5 year Warranty



Constant Current **Buck LED** Driver








EN-50121-3-2 Certified EN-60950-1 Certified UL-60950-1 Certified

RCD-48

Derating-Graph

(Ambient Temperature)



Refer to Application Notes

LIGHTLINE


DC/DC-Converter

RCD-48 Series

Specifications (typical at 25°C, nominal input voltage, rated output current unless otherwise spec

opedifications (typical at 25 G	, nonina input voitage, rateu output c	urrent unless otherwise specified
Storage Temperature		-55°C to +125°C
Case Thermal Impedance		10°C/W typ.
Soldering Temperature		265°C / 10sec. max.
Relative Humidity		95% RH
Input Filter		Capacitor only
Short Circuit Protection		Continuous, Auto Recovery
Case Material		Non Conductive Black Plastic
		Metal Case
Potting Material	Sili	cone Potting Material (UL94V-0)
Case Dimensions	Plastic Case	32.6 x 16.65 x 11.10 mm
	Metal Case	32.6 x 16.0 x 11.2 mm
Package Weight	Pinned (Plastic Case)	13g
	Wired (Plastic Case)	16g
	Pinned (Metal Case)	16g
Packing Quantity	Pinned (Plastic/Metal Case)	29 pcs.
	Wired (Plastic Case)	12 pcs.
MTBF (using MIL-HDBK217F)	+25°C	1700 x 10 ³ hours
(Nominal Vin at Full Load)	Note: Detailed Information see Application Notes chapter "MTBF"	
Safety	Shock / Vibration	EN61373
	EMC RAILWAYS	EN50121-3-2:2006
	Conducted	EN55011
	Radiated	EN55011
	ESD	EN61000-4-2
	Radiated Immunity	EN61000-4-3
	Fast Transient	EN61000-4-4
	Surge	EN61000-4-5
	Conducted Immunity	EN61000-4-6

Safe Operating Area



Note:


All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.


Package Style and Pinning

Through Hole Case (Plastic)










Through Hole Case (Metal)



Pin Connections		nections	RCD-48-x.xx	
	Pin#	Function	Comments	
	1	+Vin	DC Supply	
	2	GND	Do not connect to -Vout	
	3	Vref	Vref Voltage 4.8-5.5V typ.	
	4	PWM/ON/OFF	Leave open if not used	
	5	Analogue Dimming	Leave open if not used	
	6	-Vout	LED Cathode Connection	
	7	+Vout	LED Anode Connection	

Unit: mm Tolerance: XX.X \pm 0.5 mm XX.XX \pm 0.25 mm


LIGHTLINE

DC/DC-Converter

RCD-48 Series

Package Style and Pinning

Wired Version (Plastic)

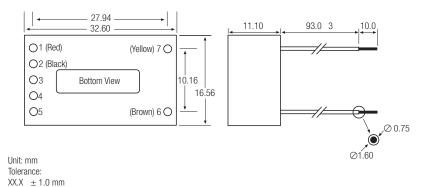


Wire Connections		RCD-48-x.xx/W	
Pin#	Function	Wire color	
1	+Vin	Red	
2	GND	Black	
3	Vref	Yellow	
4	PWM/ON/OFF	Blue	
5	Analogue Dimming	Green	
6	LED-	Brown	
7	LED+	Yellow	

Wires: UL/CSA approved (22AWG/300V)

EMI Filter Suggestions

XX.XX ± 0.25 mm

Class B

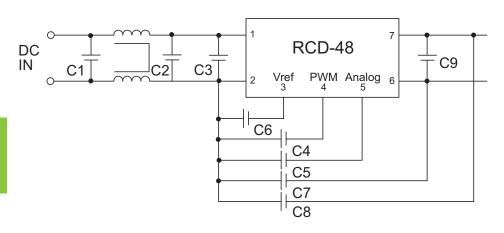


L1 1mH (e.g. WE744272102)
C1 10μF
C2 1μF
C3 100nF close to Pins
C4 - C9 10nF

Filter Suggestion

Top Layer 6 LED 1 2 1 7 LED+

Bottom Layer

LOAD







RCD-48 Series

Standard Application


Single String Application

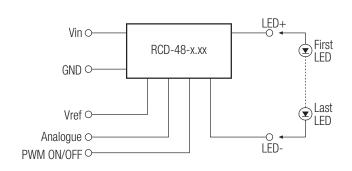


PWM Dimming Controlled

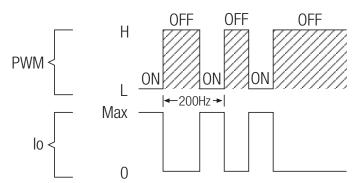


Dimming Controlled by Analog Voltage






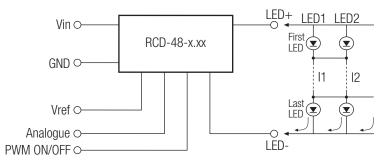

LED DIMMER for up to 10 white LEDs

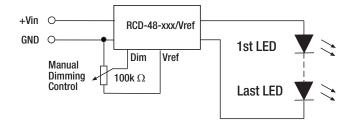

High Efficiency Lighting

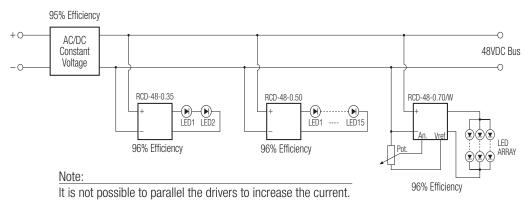

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.