

Rogowski coil; Primary rated current 1000 A; Output signal 22.5 mV per kA; Cable length 4.5 m; Feedthrough for measurement conductor 175 mm



www.wago.com/855-9450/2000-1751

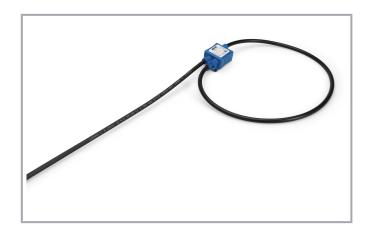

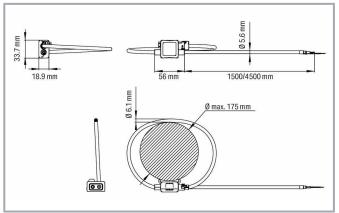

Item description

Short description:

WAGO's Rogowski coils are used to measure AC currents and are particularly well suited for retrofitting in existing systems. The split coil bobbin allows for subsequent installation around the primary conductor – be it current bars or round conductors. These Rogowski coils can be connected to WAGO's 857-552, 750-495/000-002 and 2857-570/024-000 modules. A sealable bayonet catch and mounting brackets for cable ties make for easy installation.

Data

Notes

Note

Rogowski technology allows the coils to measure a wide primary current range of up to 10,000 A without loss of accuracy, because there are no saturation effects.

The requirements for standards EN 61869-1, EN 61869-2, EN 61869-6 and EN 61869-10 are only partially met, as there are fundamental differences with current transformers for a Rogowski coil.

Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Hansastr. 27

32423 Minden

www.wago.com/855-9450/2000-1751



Input

| Measurement range | 10 A 10000 A (up to 4000 A in combination with the recommended WAGO products) |
|--|--|
| nput Current Transformers | |
| Primary rated current | 1000 A |
| Rated short-time thermal current I _{th} | 300 kA at 50 Hz |
| Rated frequency | 50 60 Hz |
| Mutual inductance M | 72.31 nH |
| Output (analog) | |
| Sensitivity | 22.5 mV/kA at 50 Hz |
| Output signal (max.) | 30 V |
| Signal Processing | |
| Limit frequency | 177 kHz |
| Measurement Error | |
| Accuracy class | 0.5 |
| Translation errors (all positions) | 0.75 % |
| Translation errors (note) | Assuming that a primary conductor with a minimum diameter of 15 mm is used that is routed perpendicular to and in contact with the coil. |
| Safety and protection | |
| Rated voltage | 1000 VAC _{rms} (Cat. III); 600 VAC _{rms} (Cat. IV) |
| Impulse withstand voltage (1.2/50 μs) | 12.8 kV |
| Protection type | IP57 |
| Test voltage | |
| Voltage for isolation test | AC 7.4 kV; 50 Hz; 1 min |
| Connection data | |
| Feedthrough for measurement conductor | Ø 175 mm |

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

08.06.2023 Page 2/6

www.wago.com/855-9450/2000-1751



Physical data

Cable length 4.5 m

Mechanical Data

Mounting type Split-core current transformer (suspended)

Material Data

Weight 130 g

Environmental requirements

| Ambient temperature (operation) | -40 +80 °C |
|---------------------------------|----------------------------|
| Ambient temperature (storage) | -40 +80 °C |
| Relative humidity | 90% (without condensation) |
| Operating altitude (max.) | 2000 m |

Standards and specifications

| Conformity marking | CE | |
|--------------------------|---------------|--|
| Standards/specifications | EN 61010-1 | |
| | EN 61010-2-32 | |
| | EN 61869-1 | |
| | EN 61869-2 | |
| | EN 61869-6 | |
| | EN 61869-10 | |
| | UL 61010-1 | |

Commercial data

| eCl@ss 10.0 | 27-21-09-02 |
|-----------------------|---------------|
| eCl@ss 9.0 | 27-21-09-02 |
| ETIM 8.0 | EC002048 |
| ETIM 7.0 | EC002048 |
| PU (SPU) | 1 pcs |
| Packaging type | bag |
| Country of origin | BG |
| GTIN | 4055143419222 |
| Customs tariff number | 90303370000 |
| | |

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Certificate

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Approvals / Certificates

General approvals

| Logo | Approval | Additional Approval Text | name |
|-------------|---------------------------------|-------------------------------|-----------|
| | EAC | TP TC 004/2011,TP TC 020/2011 | EAC RU C- |
| LUL | Brjansker Zertifizierungsstelle | | DE.AM02. |
| rmi | | | B.00111 |
| LIIL | | | /19 |
| | UL | UL 61010-2-032 | E499682 |
| ~ 1° | Underwriters Laboratories Inc. | | |



Declarations of conformity and manufacturer's declarations

Certificate Additional Approval Text Approval name Logo **EU-Declaration of Conformity**



WAGO GmbH & Co. KG

Optional accessories

Signal conditioner

Power measurement module




Item no.: 2857-570/024-000

3-Phase Power Measurement Module; 3x277/480 V/RC; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC

/024-000

www.wago.com/2857-570

Current signal conditioner



Current signal conditioner; Input for Rogowski coils; Current and voltage output signal; Digital output;

www.wago.com/857-552

Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

Downloads

Documentation

Bid Text

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-9450/2000-1751



| 855-9450/2000-1751 | 2019 Jan 24 | xml | Download |
|---|-------------|---------------|----------|
| X81 - Datei | | 6.2 kB | |
| 855-9450/2000-1751 | 2019 Jan 24 | docx | Download |
| docx - Datei | | 18.5 kB | |
| Instruction Leaflet | | | |
| Rogowski-Spulen RC70 / RC125 / RC175 | V 1.1.0 | pdf 1.7 MB | Download |
| Additional Information | | | |
| Disposal and Recycling | V 1.1.0 | pdf | Download |
| Electrical and electronic equipment, Batteries, Packaging | 2022 Aug 18 | 2.2 MB | |

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 855-9450/2000-1751

Rogowski coil; Primary rated current 1000 A; Output signal 22.5 mV per kA; Cable length 4.5 m; Feedthrough for measurement conductor 175 mm

URL Download

Installation Notes

Installation

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/855-9450/2000-1751





Screw-mount clips:

Quick and easy mounting with cable ties

Bayonet connector: Robust and durable



Lock-out seal: Greater security via sealable bayonet lock

Subject to changes. Please also observe the further product documentation!