Product data sheet Characteristics

XPSMCMCO0000S1G

RS485 Safe communications expansion module 1 way, Modicon MCM, spring term





Main

Range of Product	Modicon MCM
Product or Component Type	Safe communication expansion module
Device short name	XPSMCM
[Us] rated supply voltage	24 V - 2020 % DC

Complementary

Complementary	
Power dissipation in W	3 W
Safety level	Can reach category 4 EN/ISO 13849-1
	Can reach PL = e EN/ISO 13849-1
	Can reach SIL 3 EN/IEC 61508
	Can reach SILCL 3 IEC 62061
Quality labels	CE
Range Compatibility	Preventa XPSMCM
Connector type	4 ways RS485
Number of port	1
Communication port protocol	RS485
Current Consumption	0.125 mA
Maximum cable distance between devices	164.04 ft (50 m)
Local signalling	LED green PWR power ON
	LED green RUN operating
	LED red E IN internal error
	LED red E EX external error
Connections - terminals	2 spring clamp terminals, removable terminal block
Cable cross section	0.000.00 In² (0.22.5 mm²) - AWG 24AWG 14 flexible without cable end 0.000.00 In² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, with bezel
	0.000.00 In² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, without bezel
	0.000.00 In ² (0.22.5 mm ²) - AWG 24AWG 14 solid without cable end
	0.000.00 in ² (0.51 mm ²) - AWG 20AWG 18 flexible with cable end, with
	double bezel
Mounting support	Omega 35 mm DIN rail EN 50022
Width	0.89 in (22.5 mm)
Height	3.90 in (99 mm)
Depth	4.51 in (114.5 mm)
Net Weight	0.66 lb(US) (0.3 kg)

Environment

Product Certifications	CULus RCM TÜV
IP Degree of Protection	IP20
Ambient Air Temperature for Operation	14131 °F (-1055 °C)
Ambient Air Temperature for Storage	-4185 °F (-2085 °C)
Relative humidity	1095 %
Pollution degree	2
Insulation	250 V AC between power supply and housing EN/IEC 61800-5-1
Overvoltage category	II
Electromagnetic compatibility	Electrostatic discharge immunity test 6 kV on contact) EN/IEC 61000-4-2 Electrostatic discharge immunity test 20 kV on air) EN/IEC 61000-4-2 Susceptibility to electromagnetic fields 10 V/m 801000 MHz) EN/IEC 61000-4-3 Susceptibility to electromagnetic fields 30 V/m 1.4 GHz2 GHz) EN/IEC 61000-4-3
Vibration resistance	+/-0.35 mm 1055 Hz)EN/IEC 61496-1
Shock resistance	10 gn 16 ms) 1000 shocks on each axis EN/IEC 61496-1
Operating altitude	6561.68 ft (2000 m)
Service Life	20 year(s)

Ordering and shipping details

0 11 0	
Category	22477-SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	3606480748493
Returnability	No
Country of origin	IT

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.77 in (4.5 cm)
Package 1 Width	5.04 in (12.8 cm)
Package 1 Length	6.38 in (16.2 cm)
Package 1 Weight	6.98 oz (198.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	6
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	3.16 lb(US) (1.432 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	☑ REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	₽¥Yes
China RoHS Regulation	China RoHS Declaration

Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes


XPSMCMCO0000S1G

Dimensions

Spring Terminal






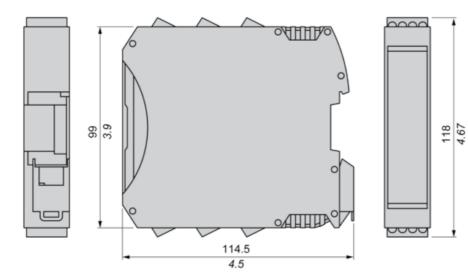


XPSMCMCO0000S1G

Mounting Safety Controller CPU with Module(s)

Mount BackPlane Connector on Rail








- 1: Connect as much Backplane Connector as module to be install.
- 2: Fix the connectors to the rail (Top first).

Mount Safety Controller CPU with Other Module(s)








- 1: Mount controller CPU and modules on rail.
- 2 : Make sure that the controller CPU or the module(s) are plugged on the BackPlane connector.

XPSMCMCO0000S1G

Wiring

Terminal Designation



Terminal	Signal
1	24 VDC
2	not connected
3	BRAIDING CH1
4	0 VDC
5	not connected
6	not connected
7	not connected
8	not connected
9	CH1-A
10	CH1-B
11	CH1-C
12	CH1-D
13	not connected
14	not connected
15	not connected
16	not connected