Ordering information

GMA300F

GM A 300 F - - -





Example recommended EMI/EMC filter



High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. 1)Series name 2)Single output

3 Output wattage 4 Universal input 5 Output voltage

® Optional *6
 C : with Coating
 J1 : Input connector

VH (J.S.T.) connector type J3 : Horizontal input connector VH (J.S.T.) connector type

R3: with Subfeatures (5V1A AUX, 12V1A AUX, Remote ON/OFF)

Specification changes when options are added. Please refer to the instruction manual for more detail.

This power supply is manufactured using SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	GMA300F-12	GMA300F-24	GMA300F-48	GMA300F-56
MAX OUTPUT WATTAGE[W]	300	300	302.4	302.4
DC OUTPUT	12V 25A	24V 12.5A	48V 6.3A	56V 5.4A

SPECIFICATIONS

	MODEL		GMA300F-12	GMA300F-24	GMA300F-48	GMA300F-56	
VOLTAGE[V]			AC85 - 264 1 φ (Output d	erating is required at AC85V	- 115V. See 3.1 in Instructio	n Manual)	
	ACIN 11EV		3.3typ				
		ACIN 230V					
	FREQUENCY[Hz]		1.6typ				
	• •	ACIN 115V		91typ	91typ	91typ	
INPUT	EFFICIENCY[%]	ACIN 230V		93typ	93typ	93typ	
	POWER FACTOR		0.95tvp	1 001.9 0	1 001,70	1 001 p	
	(lo=100%)						
		ACIN 115V					
	INRUSH CURRENT[A] ACIN 115V ACIN 230V		60typ (10=100%) (At cold start, Ta=25℃)				
	LEAKAGE CURRENT[mA]		0.13 / 0.30max (ACIN 100/240V 60Hz, Io=100%, According to IEC60601-1)				
	VOLTAGE[V]	- [12	24	48	56	
	CURRENT[A]		25	12.5	6.3	5.4	
	LINE REGULATION	mV1 *4	48max	96max	192max	192max	
	LOAD REGULATION			150max	240max	240max	
			240max	240max	400max	400max	
	RIPPLE[mVp-p] *1		320max	320max	500max	500max	
			300max	300max	500max	500max	
	RIPPLE NOISE[mVp-p]*1		360max	360max	580max	580max	
OUTPUT			120max	240max	480max	480max	
	TEMPERATURE REGULATION[mV]		150max	290max	600max	600max	
	DRIFT[mV]		48max	96max	192max	192max	
	START-UP TIME[ms]		400typ (ACIN 115V, Io=100%)				
			*Start-up time is 900ms typ for less than 1 minute of applying input again from turning off the input voltage.				
	HOLD-UP TIME[ms]		16typ (ACIN 115V, Io=85%) / 12typ (ACIN 115V, Io=100%)				
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		11.40 ~ 13.20	$22.80 \sim 26.40$	45.60 ~ 52.80	52.00 ~ 56.00	
	OUTPUT VOLTAGE SET		12.00 ~ 12.48	24.00 ~ 24.96	48.00 ~ 49.92	55.00 ~ 56.00	
	OVERCURRENT PROT						
PROTECTION	OVERVOLTAGE PROTE		13.80 to 16.80	27.60 to 33.60	55.20 to 67.20	60.00 to 70.50	
	AUX1 (12V1A)		Optional				
OTHERS	AUX2 (5V1A)		Optional				
	REMOTE ON/OFF		Optional				
	INPUT-OUTPUT · RC	· AUX *7					
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP				
ISOLATION	OUTPUT · RC · AUX-	-FG *7					
	OUTPUT-RC · AUX	*7					
	OPERATING TEMP., HUMID. AND	ALTITUDE					
	STORAGE TEMPHUMID.AND ALTITUDE		-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max				
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis				
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis				
SAFETY AND				with IEC60601-1-2 4th Ed.			
NOISE							
REGULATIONS	HARMONIC ATTENUATOR *5 Complies with IEC61000-3-2 (class A)						
	CASE SIZE/WEIGHT		50.8×37×101.6mm [2.0×1.5×4.0 inches] (W×H×D) / 230g max				
OTHERS	COOLING METHOD		Forced air (Requires external fan)				

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.
- *5 Please contact us about another class.

- *6 Specification is changed at option, refer to Instruction Manual.
- *7 Applicable when AUX and remote control (optional) is added.
- *8 Please contact us about for more detail.
- *8 Please contact us about for more detail.


 * To meet the specifications. Do not operate over-loaded condition.
- * Parallel operation is not possible.
- * Sound noise may be generated by power supply in case of pulse load.
- * Substrate bottom has a Electric potential. Insulation is required.



Features


- · High power density: 25.7W/inch3
- · High efficiency: 93% typ (Input Voltage 230V, Output Voltage 24V)
- For medical electric equipment (ANSI/AAMI ES60601-1, EN60601-1 3rd, IEC60601-1-2 4th Ed.)
- Suitable for BF application (Output-FG: 1MOPP, Input-Output: 2MOPP)
- · 2" × 4"standard footprint
- · With Remote ON/OFF (Optional)
- With AUX1 (12V 1A), AUX2 (5V 1A) (Optional)

Block diagram

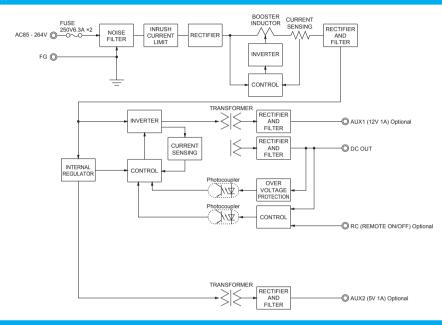

External view

* External size of option J3 is different from standard model and refer to 4 Option and Others of instruction manual for details.

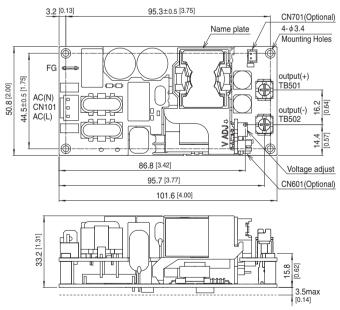

- * Tolerance ±1 [±0.04]
- * Weight: 230g max
- * There is a total of four attachment holes.
- * Dimensions in mm, []=inches
- ★ Screw tightening torque : (TB501, 502) : 1.25N · m max
- * Mounting toque : 0.6N · m max
- * Avoid contact between TB501 and 502 wiring with mounting parts.

I/	I/O Connector		Mating connector	Terminal	Mfr
Standard	CN101	1_1102704_0	1-1123722-3	1123721-1	Tyco
	CN101	1-1123724-2		1318912-1	Electronics
R3	CN601	B8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	
	CN701	B2B-PH	PHR-2	SPH-002T-P0.5S	
J1	CN101	B2P3-VH	VHR-3N	SVH-21T-P1.1	J.S.T.
	CN101	DZF3-VII	VIIV-OIN		
J1R3	CN601	B8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	
	CN701	B2B-PH	PHR-2	SPH-002T-P0.5S	

FG	Mating connector	Terminal	Mfr
250 (62409-1)	-	170603-2	Tyco Electronics

<Pin Assignments>

<CN101>

10.1.0.7				
Pin No.	Input			
1	AC(L)			
2				
3	AC(N)			

<CN601(Optional)>

Pin No.	Function		
1	RC : REMOTE ON/OFF		
2	RCG : REMOTE ON/OFF(GND)		
3	N.C. : No connection		
4	N.C. : No connection		
5	N.C. : No connection		
6	N.C. : No connection		
7	AUX2 : AUX2 (5V 1A)		
8	AUX2G: AUX2 (GND)		

<CN701(Optional)>

Pin No.	Function		
1	AUX1G: AUX1 (GND)		
2	AUX1 : AUX1 (12V 1A)		

2		1
F	-	-
Ħ	0	
H	0	- L
Ł	_	
8		7
CI	16	301

