

# TinyLogic UHS D-Type Flip-Flop with 3-STATE Output

## **NC7SZ374**

#### Description

The NC7SZ374 is a single positive edge–triggered D–type CMOS Flip–Flop with 3–STATE output from **onsemi**'s Ultra High Speed Series of TinyLogic in the space saving SC–88 6–lead package. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad  $V_{\rm CC}$  operating range. The device is specified to operate over the 1.65 V to 5.5 V  $V_{\rm CC}$  range. The inputs and output are high impedance when  $V_{\rm CC}$  is 0 V. Inputs tolerate voltages up to 5.5 V independent of  $V_{\rm CC}$  operating voltage. This single flip–flop will store the state of the D input that meets the setup and hold time requirements on the LOW–to–HIGH Clock (CP) transition. The output tolerates voltages above  $V_{\rm CC}$  in the 3–STATE condition.

#### **Features**

- Space Saving SC-88 6-Lead Package
- Ultra Small MicroPak™ Leadless Package
- Ultra High Speed:  $t_{PD} = 2.6$  ns Typ into 50 pF at 5 V  $V_{CC}$
- High Output Drive: ±24 mA at 3 V V<sub>CC</sub>
- Broad V<sub>CC</sub> Operating Range: 1.65 V to 5.5 V
- ullet Matches the Performance of LCX when Operated at 3.3 V  $V_{CC}$
- Power Down High Impedance Inputs / Output
- Overvoltage Tolerant Inputs Facilitate 5 V 3 V Translation
- Patented Noise / EMI Reduction Circuitry Implemented
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant





Figure 1. Logic Symbol

#### MARKING DIAGRAMS





SC-88 CASE 419B-02



C9, Z74 = Specific Device Code

KK = 2-Digit Lot Run Traceability Code XY = 2-Digit Date Code Format

Z = Assembly Plant Code

M = Date Code\*
= Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

## **Connection Diagrams**




Figure 2. SC-88 (Top View)





Figure 4. MicroPak (Top Through View)



AAA represents Product Code Top Mark - see ordering code.

NOTE: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Figure 3. Pin 1 Orientation

## **PIN DESCRIPTIONS**

Pin Name	Description
D	Data Input
СР	Clock Pulse Input
ŌĒ	Output Enable Input
Q	Flip-Flop Output

## **FUNCTION TABLE**

	Output		
СР	D	ŌĒ	Q
	L	L	L
	Н	L	Н
~	Х	L	Q <sub>n</sub>
X	X	Н	Z

H = HIGH Logic Level

L = LOW Logic Level

X = Immaterial

Z = High Impedance Q<sub>n</sub> = No Change in Data

## **NC7SZ374**

### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Param	Min	Max	Unit	
V <sub>CC</sub>	Supply Voltage		-0.5	+6.5	V
V <sub>IN</sub>	DC Input Voltage		-0.5	+6.5	V
V <sub>OUT</sub>	DC Output Voltage		-0.5	+6.5	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>IN</sub> < 0 V	-	-50	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>OUT</sub> < 0 V	-	-50	mA
I <sub>OUT</sub>	DC Output Source / Sink Current	-	±50	mA	
I <sub>CC</sub> / I <sub>GND</sub>	DC V <sub>CC</sub> / GND Current		-	±50	mA
T <sub>STG</sub>	Storage Temperature Range		-65	+150	°C
$T_J$	Junction Temperature under Bias		-	150	°C
TL	Junction Lead Temperature (Sold	ering, 10 Seconds)	-	260	°C
$P_{D}$	Power Dissipation in Still Air SC-88		-	332	mW
		MicroPak	-	812	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage Operating		1.65	5.5	V
	Supply Voltage Data Retention		1.5	5.5	
V <sub>IN</sub>	Input Voltage		0	5.5	V
V <sub>OUT</sub>	Output Voltage	Active State	0	V <sub>CC</sub>	V
		3-STATE	0	5.5	V
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time	V <sub>CC</sub> = 1.8 V, 2.5 V ±0.2 V	0	20	ns/V
		V <sub>CC</sub> = 3.3 V ±0.3 V	0	10	
		V <sub>CC</sub> = 5.5 V ±0.5 V	0	5	
T <sub>A</sub>	Operating Temperature		-40	+85	°C
$\theta_{\sf JA}$	Thermal Resistance	SC-88	-	377	°C/W
		MicroPak	_	154	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

1. Unused inputs must be held HIGH or LOW. They may not float.

## NC7SZ374

## DC ELECTICAL CHARACTERISTICS

					T,	T <sub>A</sub> = +25°C		T <sub>A</sub> = -40	to +85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Co	nditions	Min	Тур	Max	Min	Max	Unit
$V_{IH}$	HIGH Level Control	1.65 to 1.95			0.65 V <sub>CC</sub>	-	-	0.65 V <sub>CC</sub>	-	٧
	Input Voltage	2.3 to 5.5			0.7 V <sub>CC</sub>	-	-	0.7 V <sub>CC</sub>	-	
$V_{IL}$	LOW Level Control	1.65 to 1.95			-	-	0.35 V <sub>CC</sub>	-	0.35 V <sub>CC</sub>	٧
	Input Voltage	2.3 to 5.5			_	-	0.3 V <sub>CC</sub>	-	0.3 V <sub>CC</sub>	
V <sub>OH</sub>	HIGH Level Control	1.65	$V_{IN} = V_{IH}$	$I_{OH} = -100 \mu A$	1.55	1.65	-	1.55	-	V
	Output Voltage	1.8	or V <sub>IL</sub>		1.7	1.8	-	1.7	-	
		2.3			2.2	2.3	-	2.2	_	
		3.0			2.9	3.0	-	2.9	_	
		4.5			4.4	4.5	-	4.4	-	
		1.65		I <sub>OH</sub> = -4 mA	1.24	1.52	-	1.29	-	
		2.3		I <sub>OH</sub> = -8 mA	1.9	2.15	-	1.9	_	
		3.0		I <sub>OH</sub> = -16 mA	2.4	2.8	-	2.4	_	
		3.0		I <sub>OH</sub> = -24 mA	2.3	2.68	-	2.3	_	
		4.5		I <sub>OH</sub> = -32 mA	3.8	4.2	-	3.8	_	
$V_{OL}$	LOW Level Control	1.65	$V_{IN} = V_{IH}$	I <sub>OL</sub> = 100 μA	-	0.0	0.1	-	0.1	٧
	Output Voltage	1.8	or V <sub>IL</sub>		_	0.0	0.1	-	0.1	
		2.3			_	0.0	0.1	-	0.1	
		3.0			_	0.0	0.1	-	0.1	
		4.5			_	0.0	0.1	-	0.1	
		1.65		I <sub>OL</sub> = 4 mA	-	0.08	0.24	-	0.24	
		2.3		I <sub>OL</sub> = 8 mA	-	0.10	0.3	-	0.3	
		3.0		I <sub>OL</sub> = 16 mA	_	0.15	0.4	-	0.4	
		3.0		I <sub>OL</sub> = 24 mA	_	0.22	0.55	-	0.55	
		4.5		I <sub>OL</sub> = 32 mA	_	0.22	0.55	-	0.55	
I <sub>IN</sub>	Input Leakage Current	1.65 to 5.5	$0 \le V_{IN} \le 5$	5.5 V	-	-	±0.1	-	±1.0	μΑ
l <sub>OZ</sub>	3-STATE Output Leakage	1.65 to 5.5	$V_{IN} = V_{IL} \circ 0 \le V_{OUT} \le 0$	or V <sub>IH</sub> ≤ 5.5 V	-	-	±0.5	-	±5.0	μΑ
l <sub>OFF</sub>	Power Off Leakage Current	0.0	V <sub>IN</sub> or V <sub>OL</sub>	<sub>JT</sub> = 5.5 V	-	-	1.0	-	10	μΑ
I <sub>CC</sub>	Quiescent Supply Current	1.65 to 5.5	V <sub>IN</sub> = 5.5 \	/, GND	-	-	1.0	-	10.0	μΑ

## **NC7SZ374**

### **AC ELECTRICAL CHARACTERISTICS**


					T <sub>A</sub> = +25°C		T <sub>A</sub> = -40	to +85°C		
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Min	Тур	Max	Min	Max	Unit	
f <sub>MAX</sub>	Maximum Clock Frequency	1.65	C <sub>L</sub> = 50 pF,	-	_	-	100	_	MHz	
	(Figures 5, 7)	1.8	$R_D = 500 \Omega$ , $S_1 = Open$	-	_	-	100	-		
		2.5 ±0.2		-	_	-	125	-		
		3.3 ±0.3		-	_	-	150	-		
		5.0 ±0.5		-	_	-	175	-		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay, CP to Q	1.65	C <sub>L</sub> = 15 pF,	-	9.7	1.50	-	16.5	ns	
	(Figures 5, 7)	1.8	$R_D = 1 M\Omega$ , $S_1 = Open$	-	6.5	10.0	-	11.0		
		2.5 ±0.2		-	3.8	6.5	_	7.0		
		3.3 ±0.3		-	2.8	4.5	_	5.0		
		5.0 ±0.5		-	2.2	3.5	_	3.8		
		3.3 ±0.3	C <sub>L</sub> = 50 pF,	-	3.4	5.5	_	6.2		
		5.0 ±0.5	$R_D = 500 \Omega$ , $S_1 = Open$	_	2.6	4.0	<u> </u>	4.7		
t <sub>PZL,</sub> t <sub>PZH</sub>	Output Enable Time	1.65	C <sub>L</sub> = 50 pF,	_	9.0	13.5	_	14.3	ns	
(Figures 5, 8)	1.8	$V_I = 2 \times V_{CC}$ , $R_U$ , $R_D = 500 \Omega$ ,	_	6.0	9.0	_	9.5			
		2.5 ±0.2	$S_1 = GND$ for $t_{PZH}$ $S_1 = V_I$ for $t_{PZL}$	_	3.7	6.0	_	6.6		
		3.3 ±0.3		_	2.8	5.0	_	5.3	1	
		5.0 ±0.5		-	2.2	3.7	<u> </u>	3.9		
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Output Disable Time	1.65	C <sub>L</sub> = 50 pF,	_	7.7	12.0	<u> </u>	13.0	ns	
	(Figures 5, 8)	1.8	$V_{I} = 2 \times V_{CC},$ $R_{U}, R_{D} = 500 \Omega,$	_	5.1	8.0	_	8.5		
		2.5 ±0.2	$S_1 = \overline{G}ND$ for $t_{PHZ}$ $S_1 = V_I$ for $t_{PLZ}$	_	3.5	6.0	<b>1</b> –	6.3		
		3.3 ±0.3		_	2.8	4.5	<b>1</b> –	4.7		
		5.0 ±0.5		_	2.23	3.7	_	3.9		
t <sub>S</sub>	Setup Time, CP to D	2.5 ±0.2	C <sub>L</sub> = 50 pF,	_	_	-	2.5	-	ns	
	(Figures 5, 9)	3.3 ±0.3	$R_D = 500 \Omega$ , $S_1 = Open$	_	_	-	2.0	-		
		5.0 ±0.5			_	-	1.5	-		
t <sub>H</sub>	Hold Time, CP to D	2.5 ±0.2	C <sub>L</sub> = 50 pF,	-	_	-	1.5	-	ns	
	(Figures 5, 9)	3.3 ±0.3	$R_D = 500 \Omega$ , $S_1 = Open$	_	_	-	1.5	-		
		5.0 ±0.5		_	_	-	1.5	-		
t <sub>W</sub>	Pulse Width, CP	2.5 ±0.2	C <sub>L</sub> = 50 pF,	-	_	-	3.0	-	ns	
	(Figures 5, 9)	3.3 ±0.3	$R_D = 500 \Omega,$ $S_1 = Open$	_	_	-	2.8	-		
		5.0 ±0.5		-	-	-	2.5	-		

## **CAPACITANCE** ( $T_A = +25^{\circ}C$ , f = 1 MHz)

Symbol	Parameter	Condition	Тур	Max	Units
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = Open, V <sub>IN</sub> = 0 V or V <sub>CC</sub>	3	=	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC}$ = 3.3 V, $V_{IN}$ = 0 V or $V_{CC}$	4	-	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 2)	V <sub>CC</sub> = 3.3 V V <sub>CC</sub> = 5.0 V	10 12	- -	pF

C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle. (See Figure 6)
 C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>) (V<sub>CC</sub>) (f<sub>IN</sub>) + (I<sub>CC</sub>static).

### **AC Loading and Waveforms**



 $C_L$  includes load and stray capacitance Input PRR = 1.0 MHz,  $t_W$  = 500 ns.

#### Figure 5. AC Test Circuit





Figure 7. AC Waveforms



CP Input = AC Waveform;  $t_r = t_f = 1.8$  ns; CP Input PRR = 10 MHz; Duty Cycle = 50% D Input PRR = 5 MHz; Duty Cycle = 50%.

### Figure 6. I<sub>CCD</sub> Test Circuit




Figure 8. AC Waveforms




Figure 9. AC Waveforms

## **ORDERING INFORMATION**


Device	Top Mark	Packages	Shipping <sup>†</sup>
NC7SZ374P6X	Z74	SC-88	3000 / Tape & Reel
NC7SZ374P6X-L22347	Z74	SC-88	3000 / Tape & Reel
NC7SZ374L6X	C9	SIP6, MicroPak	5000 / Tape & Reel
NC7SZ374L6X-L22175	C9	SIP6, MicroPak	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.



**DATE 31 AUG 2016** 

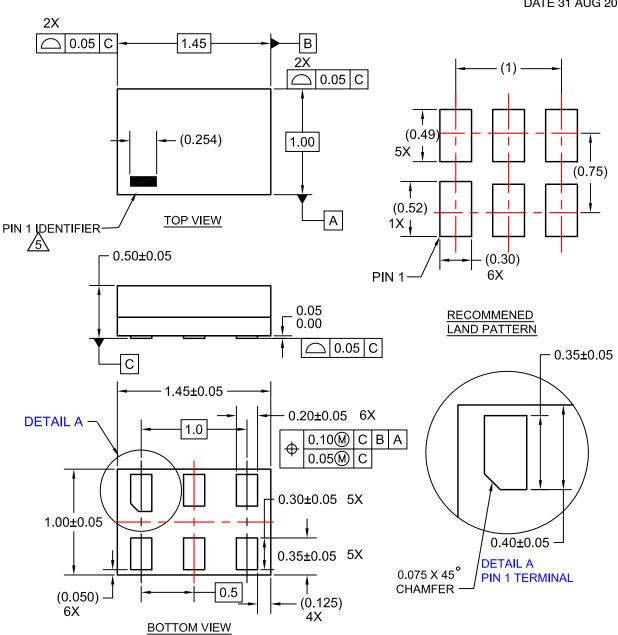

NOTES:

- 1. CONFORMS TO JEDEC STANDARD MO-252 VARIATION UAAD
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-2009
  4. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY


  - OTHER LINE IN THE MARK CODE LAYOUT.


DOCUMENT NUMBER:	98AON13590G	Electronic versions are uncontrolled except when accessed directly from the Document Report Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SIP6 1.45X1.0		PAGE 1 OF 1		

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

#### SC-88/SC70-6/SOT-363 CASE 419B-02 **ISSUE Y**

**DATE 11 DEC 2012** 

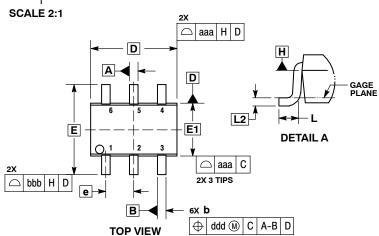

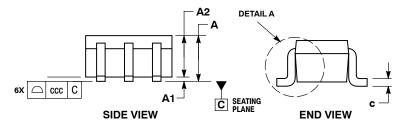

#### **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code


= Date Code\*

= Pb-Free Package

(Note: Microdot may be in either location)

- \*Date Code orientation and/or position may vary depending upon manufacturing location.
- \*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

#### **RECOMMENDED SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42985B	Electronic versions are uncontrolled except when accessed directly from the Document Repo Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SC-88/SC70-6/SOT-363		PAGE 1 OF 2		

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
   CONTROLLING DIMENSION: MILLIMETERS
- CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AND DATUM H. DATUMS A AND B ARE DETERMINED AT DATUM H. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.

- DIMENSION & DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION 6 AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.

	MIL	LIMETE	ERS	INCHES			
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α		-	1.10			0.043	
A1	0.00	-	0.10	0.000		0.004	
A2	0.70	0.90	1.00	0.027	0.035	0.039	
b	0.15	0.20	0.25	0.006	0.008	0.010	
С	0.08	0.15	0.22	0.003	0.006	0.009	
D	1.80	2.00	2.20	0.070	0.078	0.086	
E	2.00	2.10	2.20	0.078	0.082	0.086	
E1	1.15	1.25	1.35	0.045	0.049	0.053	
е		0.65 BS	С	0.026 BSC			
L	0.26	0.36	0.46	0.010	0.014	0.018	
L2	0.15 BSC			0.006 BSC			
aaa	0.15			0.006			
bbb	0.30			0.012			
ccc		0.10			0.004		
ddd		0.10			0.004		

### SC-88/SC70-6/SOT-363 CASE 419B-02 ISSUE Y

**DATE 11 DEC 2012** 

STYLE 1: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 1 4. EMITTER 1 5. BASE 1 6. COLLECTOR 2	STYLE 2: CANCELLED	STYLE 3: CANCELLED	STYLE 4: PIN 1. CATHODE 2. CATHODE 3. COLLECTOR 4. EMITTER 5. BASE 6. ANODE	STYLE 5: PIN 1. ANODE 2. ANODE 3. COLLECTOR 4. EMITTER 5. BASE 6. CATHODE	STYLE 6: PIN 1. ANODE 2 2. N/C 3. CATHODE 1 4. ANODE 1 5. N/C 6. CATHODE 2
STYLE 7: PIN 1. SOURCE 2 2. DRAIN 2 3. GATE 1 4. SOURCE 1 5. DRAIN 1 6. GATE 2	STYLE 8: CANCELLED	STYLE 9: PIN 1. EMITTER 2 2. EMITTER 1 3. COLLECTOR 1 4. BASE 1 5. BASE 2 6. COLLECTOR 2	STYLE 10: PIN 1. SOURCE 2 2. SOURCE 1 3. GATE 1 4. DRAIN 1 5. DRAIN 2 6. GATE 2	STYLE 11: PIN 1. CATHODE 2 2. CATHODE 2 3. ANODE 1 4. CATHODE 1 5. CATHODE 1 6. ANODE 2	STYLE 12: PIN 1. ANODE 2 2. ANODE 2 3. CATHODE 1 4. ANODE 1 5. ANODE 1 6. CATHODE 2
STYLE 13: PIN 1. ANODE 2. N/C 3. COLLECTOR 4. EMITTER 5. BASE 6. CATHODE	STYLE 14: PIN 1. VREF 2. GND 3. GND 4. IOUT 5. VEN 6. VCC	STYLE 15: PIN 1. ANODE 1 2. ANODE 2 3. ANODE 3 4. CATHODE 3 5. CATHODE 2 6. CATHODE 1	STYLE 16: PIN 1. BASE 1 2. EMITTER 2 3. COLLECTOR 2 4. BASE 2 5. EMITTER 1 6. COLLECTOR 1	STYLE 17: PIN 1. BASE 1 2. EMITTER 1 3. COLLECTOR 2 4. BASE 2 5. EMITTER 2 6. COLLECTOR 1	STYLE 18: PIN 1. VIN1 2. VCC 3. VOUT2 4. VIN2 5. GND 6. VOUT1
STYLE 19: PIN 1. I OUT 2. GND 3. GND 4. V CC 5. V EN 6. V REF	STYLE 20: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. EMITTER 5. COLLECTOR 6. COLLECTOR	STYLE 21: PIN 1. ANODE 1 2. N/C 3. ANODE 2 4. CATHODE 2 5. N/C 6. CATHODE 1	STYLE 22: PIN 1. D1 (i) 2. GND 3. D2 (i) 4. D2 (c) 5. VBUS 6. D1 (c)	STYLE 23: PIN 1. Vn 2. CH1 3. Vp 4. N/C 5. CH2 6. N/C	STYLE 24: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. CATHODE 5. CATHODE 6. CATHODE
STYLE 25: PIN 1. BASE 1 2. CATHODE 3. COLLECTOR 2 4. BASE 2 5. EMITTER 6. COLLECTOR 1	STYLE 26: PIN 1. SOURCE 1 2. GATE 1 3. DRAIN 2 4. SOURCE 2 5. GATE 2 6. DRAIN 1	STYLE 27: PIN 1. BASE 2 2. BASE 1 3. COLLECTOR 1 4. EMITTER 1 5. EMITTER 2 6. COLLECTOR 2	STYLE 28: PIN 1. DRAIN 2. DRAIN 3. GATE 4. SOURCE 5. DRAIN 6. DRAIN	STYLE 29: PIN 1. ANODE 2. ANODE 3. COLLECTOR 4. EMITTER 5. BASE/ANODE 6. CATHODE	STYLE 30: PIN 1. SOURCE 1 2. DRAIN 2 3. DRAIN 2 4. SOURCE 2 5. GATE 1 6. DRAIN 1

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

DOCUMENT NUMBER:	98ASB42985B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SC-88/SC70-6/SOT-363		PAGE 2 OF 2

ON Semiconductor and III are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative