























### Features

- Wide input range 180 ~ 528VAC
- Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- IP67 / IP65 design for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming (dim-to-off); Timer dimming
- Typical lifetime>50000 hours
- 5 years warranty


# Applications

- · LED street lighting
- · LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HVGC-150 series is a 150W LED AC/DC LED power supply featuring the constant current mode and high voltage output. HVGC-150 operates from 180~528VAC and offers models with different rated current ranging between 350mA and 1400mA. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C ~ +80°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVGC-150 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## ■ Model Encoding

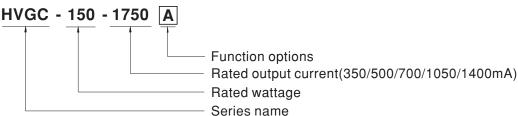

Type	IP Level	Function	Note
Α	IP65	lo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request


## **SPECIFICATION**

MODEL		HVGC-150-350	HVGC-150-500	HVGC-150-700	HVGC-150-1050	HVGC-150-1400		
	RATED CURRENT	350mA	500mA	700mA	1050mA	1400mA		
	RATED POWER	149.8W	150W	150.5W	150.15W	149.8W		
CONSTANT CURRENT REGION NO			30 ~ 300V	21 ~ 215V	15 ~ 143V	12 ~ 107V		
OUTPUT	OUTO IN THE OUTCE THE TEST THE OUT HOUSE	Adjustable for A/AB-Type			10 1101	12 1011		
OUIFUI	CURRENT ADJ. RANGE	210 ~ 350mA	300 ~ 500mA	420 ~ 700mA	630 ~ 1050mA	840 ~ 1400mA		
	CURRENT RIDRI E Noto 5		1	420 700IIIA	000 1000111A	040 1400IIIA		
	CURRENT RIPPLE Note.5	8.0% max. @rated current						
	CURRENT TOLERANCE	±5.0%						
	SET UP TIME Note.4	500ms/230Vac 400ms/347VAC,480VAC						
	VOLTAGE RANGE Note.3	180 ~ 528VAC						
	EDECUENCY DANCE	(Please refer to "STATIC CHARACTERISTIC" section)						
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR (Typ.)	$PF \! \ge \! 0.98/230 VAC, PF \! \ge \! 0.97/277 VAC, PF \! \ge \! 0.95/347 VAC, PF \! \ge \! 0.93/480 VAC \mathbin{\textcircled{\texttt{@}}} full \ load$						
	FOWER TACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)						
	TOTAL HARMONIC DISTORTION	THD< 20%(@ load≥50°		. •	OVAC)			
INPUT	TO THE THANKING HIS DIG TO KITTON	(Please refer to "TOTAL						
	EFFICIENCY (Typ.)	91%	91%	91%	90%	90%		
	AC CURRENT (Typ.)		A / 480VAC					
	INRUSH CURRENT (Typ.)	COLD START 35A(twidth=790µs measured at 50% Ipeak) at 480VAC; Per NEMA 410						
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 480VAC						
	LEAKAGE CURRENT	<0.75mA / 480VAC						
	SHORT CIRCUIT		recovers automatically a	after fault condition is rem	oved			
	SHOKT CIRCUIT	430 ~ 460V	316 ~ 346V	226 ~ 247V	151 ~ 165V	113 ~ 124V		
PROTECTION	OVER VOLTAGE				131 ~ 1037	113 124 1		
	OVED TEMPEDATURE	Shut down o/p voltage with auto-recovery or re-power on to recovery  Shut down o/p voltage, recovers automatically after temperature goes down						
	OVER TEMPERATURE	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)						
ENVIRONMENT	WORKING TEMP.	, , , , , , , , , , , , , , , , , , ,						
	MAX. CASE TEMP.	Tcase=+80°C						
	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)						
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
SAFETY STANDARDS		UL8750(type"HL"), CSA C22.2 No. 250.0-08, TUV BS EN/EN61347-1, BS EN/EN61347-2-13, EAC TP TC 004, IP65 or IP67 approved						
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC						
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH						
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 50%); BS EN/EN61000-3-3, FCC part 15 class B, EAC TP TC 020						
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020						
	MTBF	179.5K hrs min. MIL-H	IDBK-217F (25°C)					
OTHERS	DIMENSION	245*68*38.8mm (L*W*H)						
	PACKING	1.24Kg; 12pcs/15.9Kg/0.	78CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 347VAC input, rated current and 25°C of ambient temperature.							
NOTE	2. Please refer to "DRIVING METHODS OF LED MODULE".							
	3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.							
	4. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.							
	5. Current ripple is measured between 50%~100% of maximum voltage under rated power delivery.							
	6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the							
	complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.  7. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently							
	7 To fulfill requirements of the	connected to the mains.						
			8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 80°C or less.					
	connected to the mains.	life expectancy of >50.00	00 hours of operation wh	en Tcase, particularly (to	point (or TMP, per DLC)	, is about 80°C or less.		
	connected to the mains.  8. This series meets the typical		•		) point (or TMP, per DLC)	, is about 80°C or less.		
	connected to the mains.  8. This series meets the typical  9. Please refer to the warranty	statement on MEAN WE	LL's website at http://ww	w.meanwell.com.				
	connected to the mains.  8. This series meets the typical	statement on MEAN WEI derating of $3.5^{\circ}$ C/1000m w	LL's website at http://ww vith fanless models and o	w.meanwell.com. of $5^{\circ}\text{C}/1000\text{m}$ with fan m	odels for operating altitude			
	connected to the mains.  8. This series meets the typical  9. Please refer to the warranty  10. The ambient temperature of	statement on MEAN WEI derating of 3.5°C/1000m w and IP water proof function	LL's website at http://ww vith fanless models and d installation caution, plea	w.meanwell.com. of $5^{\circ}\text{C}/1000\text{m}$ with fan m	odels for operating altitude			




### **■** Block Diagram

PFC fosc: 130KHz PWM fosc: 70KHz

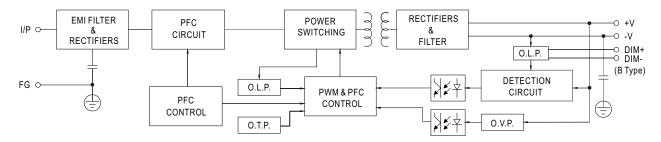

#### **■** DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

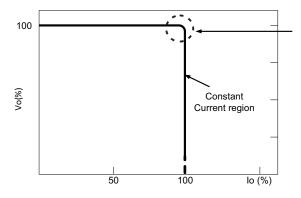


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




#### **■ DIMMING OPERATION**




#### imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 0 ~ 10VDC

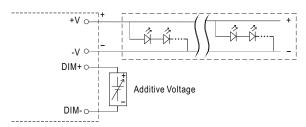


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

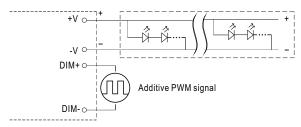



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

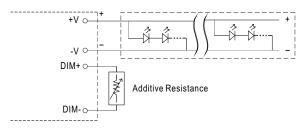

"DO NOT connect "DIM- to -V"








Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



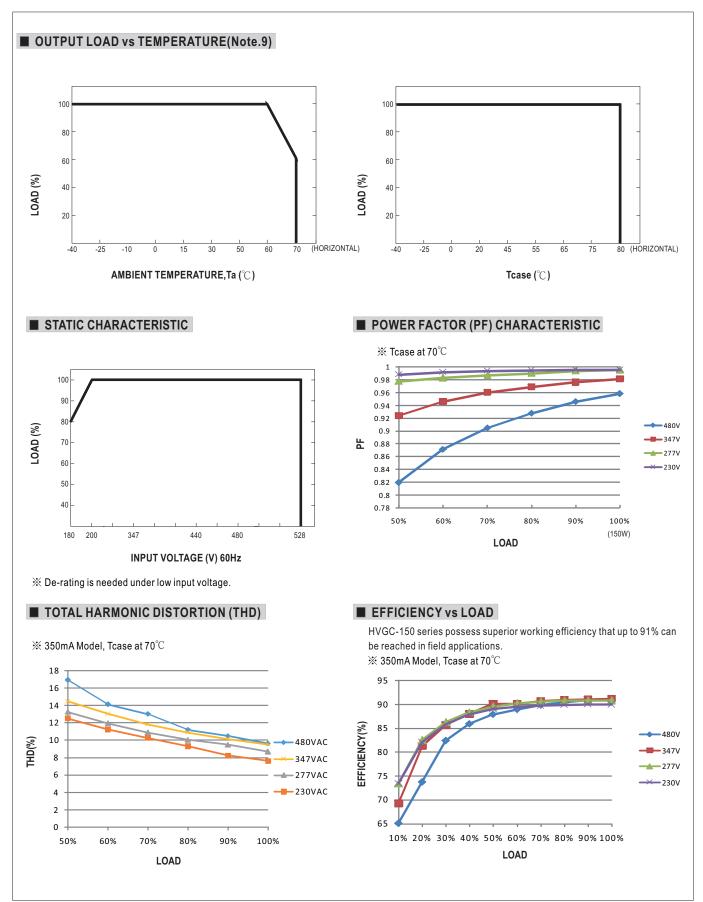




# ■ LIFE TIME

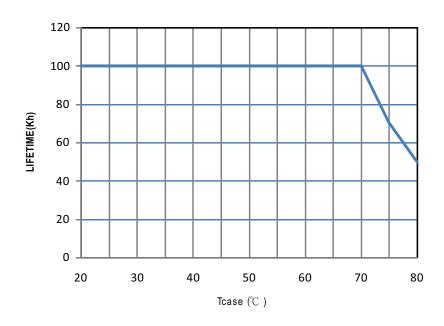






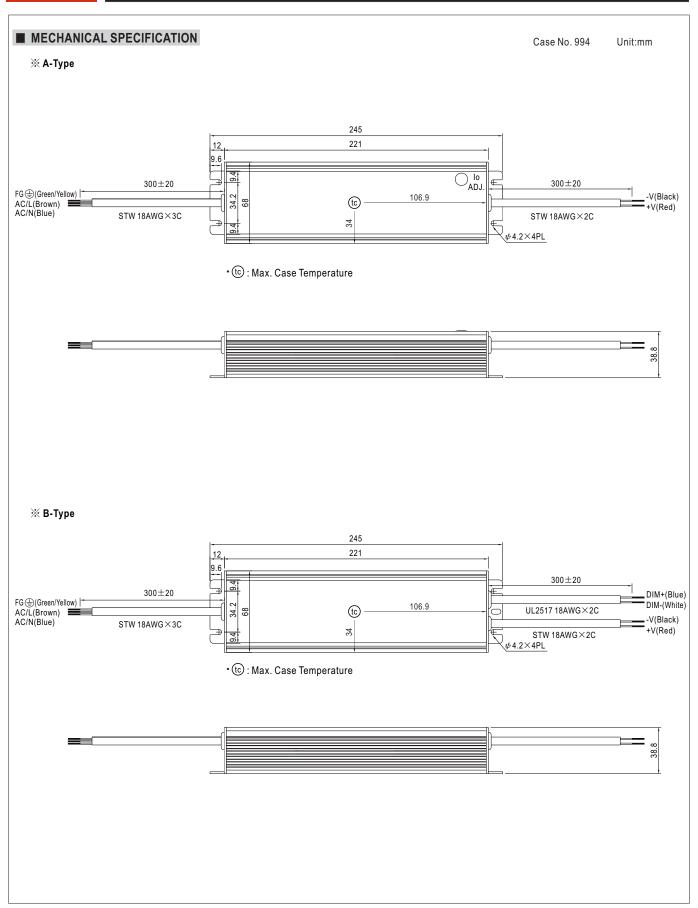



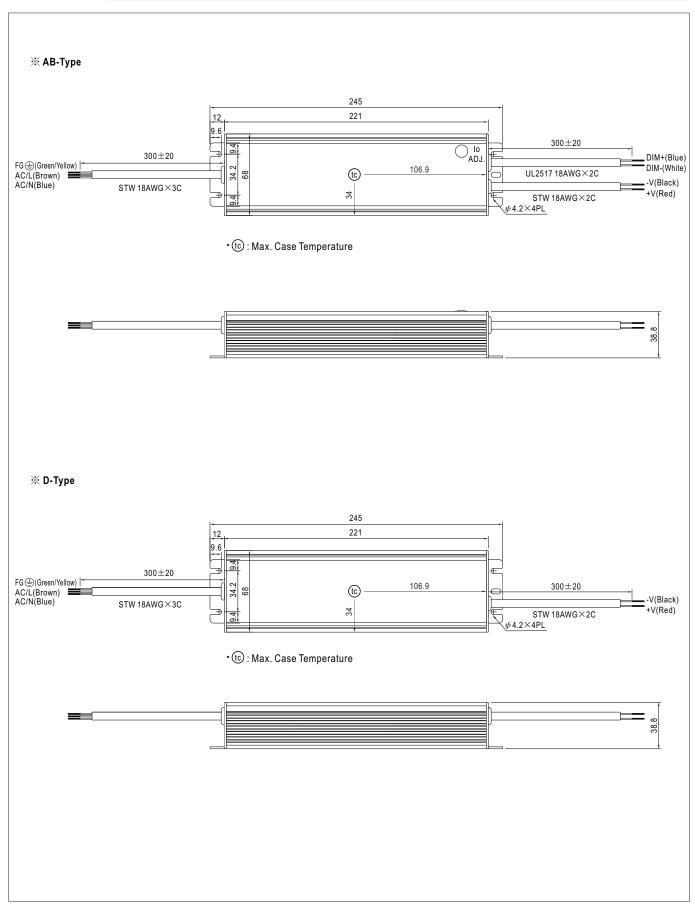


LED Lamp



#### ■ WATERPROOF CONNECTION

#### Waterproof connector

Waterproof connector can be assembled on the output cable of HVGC-150 to operate in dry/wet/damp or outdoor environment.

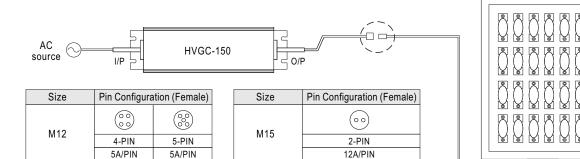


Order No.

Suitable Current

#### **X** Cable Joiner

Order No.

Suitable Current

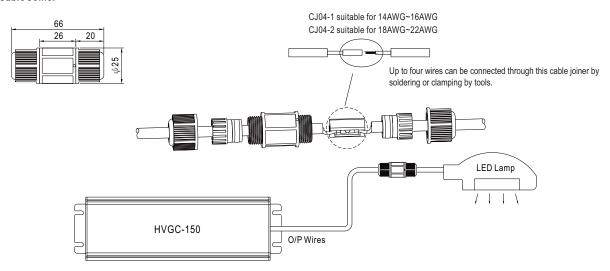

M15-02

12A max

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.


M12-05

10A max.

M12-04

10A max.

#### **※** Junction Box Option

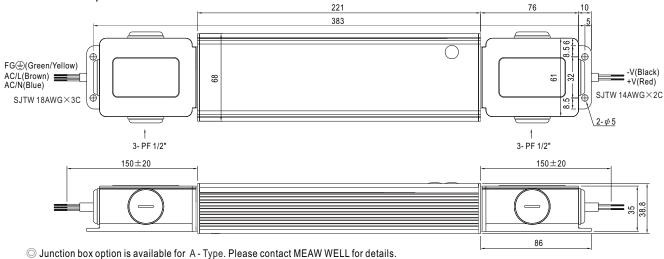

# ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html