
1-conductor THT female connector angled; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 10-pole; 1.0 mm Ø solder pin;

Gripping plate; direct marking; 1,50 mm²; light gray

www.wago.com/2091-1360/000-1000





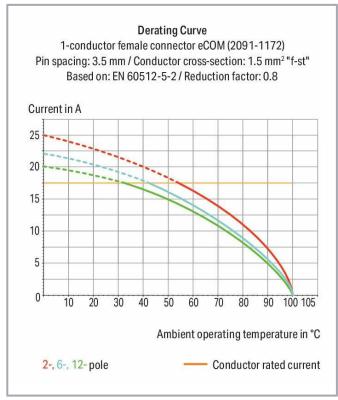


 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$


WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2091-1360/000-1000



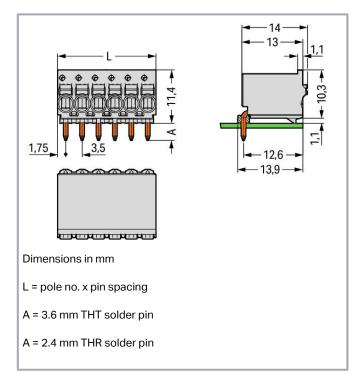



Item description

- Universal connection for all conductor types
- Simple, push-in termination of solid and ferruled conductors
- Easy-to-use design does not require special tools
- Ability to wire while mated or unmated
- Integrated test ports for testing parallel to conductor entry
- Custom-installed solder pins

Data Notes

Safety information

The picoMAX® Pluggable Connection System includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected /disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Electrical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2091-1360/000-1000



Ratings per IEC/EN

Ratings per	IEC/EN 60664-1	
Nominal voltage (III/3)	160 V	
Rated impulse voltage (III/3)	2.5 kV	
Rated voltage (III/2)	160 V	
Rated impulse voltage (III/2)	2.5 kV	
Nominal voltage (II/2)	320 V	
Rated surge voltage (II/2)	2.5 kV	
Rated current	10 A	
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2	

Ratings per UL 1059

Approvals per	UL 1059
Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	10 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

Connection data

Connection points	10
Total number of potentials	10
Number of connection types	1
Number of levels	1

Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-button
Actuation direction 1	Operation parallel to conductor entry
Solid conductor	0.2 1.5 mm² / 24 14 AWG
Fine-stranded conductor	0.2 1.5 mm² / 24 14 AWG
Fine-stranded conductor; with insulated ferrule	0.25 0.75 mm ²
Fine-stranded conductor; with uninsulated ferrule	0.25 1.5 mm²
Strip length	8 9 mm / 0.31 0.35 inches
Conductor connection direction to PCB	0°
Pole number	10

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2091-1360/000-1000



Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	35 mm / 1.378 inches
Height	11.4 mm / 0.449 inches
Depth	38 mm / 1.496 inches
Solder pin length	3.6 mm
Solder pin diameter	1 mm
Drilled hole diameter with tolerance	1.2 ^(±0.1) mm

Mechanical Data

Variable coding	No
Design	With gripping plate
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for PCB
Mismating protection	No
Plugging without loss of pin spacing	Yes
Mating direction to the PCB	0 °
Locking of plug-in connection	none

PCB contact

Material Data

Note (material data)

Information on material specifications can be found here

Color	light gray	
Material group	I	
Insulation material	Polyphthalamide (PPA GF)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E _{Cu})	
Contact plating	Tin	

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2091-1360/000-1000



Fire load	0.03 MJ
Weight	6.3 g
Environmental requirements	
Limit temperature range	-60 +100 °C
Processing temperature	-35 +60 °C
Commercial data	
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	50 pcs
Packaging type	box
Country of origin	DE
GTIN	4050821364870
Customs tariff number	85366990990
Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption
Approvals / Certificates	

General approvals

Logo	Approval	Additional Approval Text	name
	СВ	IEC 61984	NL-49736
	DEKRA Certification B.V.		/A1
(1)	CSA DEKRA Certification B.V.	C22.2	2362521
KEMA	KEMA/KEUR DEKRA Certification B.V.	EN 61984	71- 102260 REV.1
	UL Underwriters Laboratories Inc.	UL 1977	E45171

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Certificate

www.wago.com/2091-1360/000-1000



Optional accessories

Coding

Coding

Item no.: 2091-1610

Coding key carrier; suitable for 3.5 mm pin spacing; orange

www.wago.com/2091-1610

Downloads

Documentation

Additional Information

Technical Section 2019 Apr 3 Download pdf 2.0 MB Technical explanations

CAD/CAE-Data

PCB Design

Symbol and Footprint 2091-1360/000-1000

URL Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- **Eagle Libraries**
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

05.06.2023 Page 6/8

www.wago.com/2091-1360/000-1000



- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 2091-1360/000-1000


1-conductor THT female connector angled; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 10-pole; 1.0 mm Ø solder pin; Gripping plate; direct marking; 1,50 mm²; light gray


URL Download

Installation Notes

Conductor termination







Solid and ferruled conductors are terminated by simply pushing them into unit.

Marking

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2091-1360/000-1000








Pole marking via direct marking perpendicular to conductor entry.

Pole marking via factory direct marking.

Testing



Testing via 1 mm Ø test pin – touch contact.

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$