




This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []

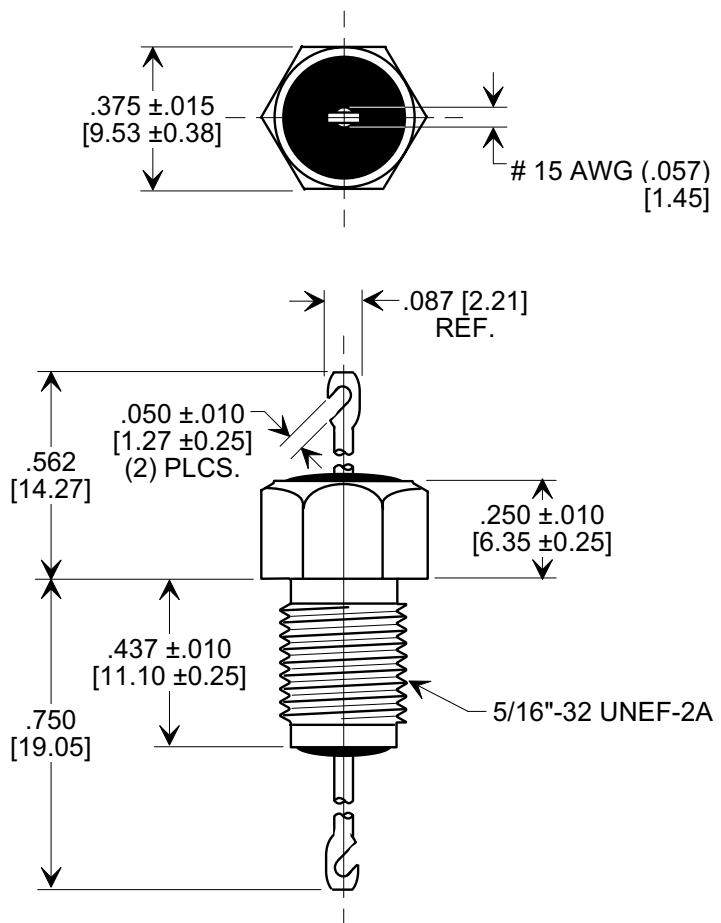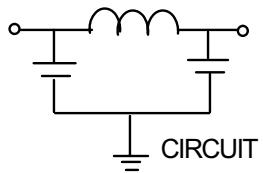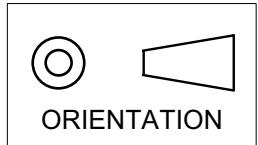

NOTES:

1. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. PARTS WILL BE MARKED M15733/61.

2000	500 VDC / 350 VAC	25 AC	I.R. MIN. @ 100 (VDC.)	DWV	----	55	70	70
					10 MHz	100 MHz	1 GHz	10 GHz
MIN. CAP. (pF)	WORKING VOLTAGE	CURRENT (A)	10 G Ω	1250 VDC	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			

REVISION RECORD	0				TOLERANCES unless otherwise specified	MIL-15733/61-0004 BUSHING STYLE FILTER		
Original Release C.O.	20070423-1-01				2 PLC. DECIMAL ± N/A			
			3 PLC. DECIMAL ± .031 [0.79]	ANGLES ± N/A	Drawn S.M. 04-23-07	Scale 2 X		
				Approved R.L. 04-23-07				
			TUSONIX TUCSON, ARIZONA	A	4206-501			