


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECN-21-101446	22MAR2021	ED	WH

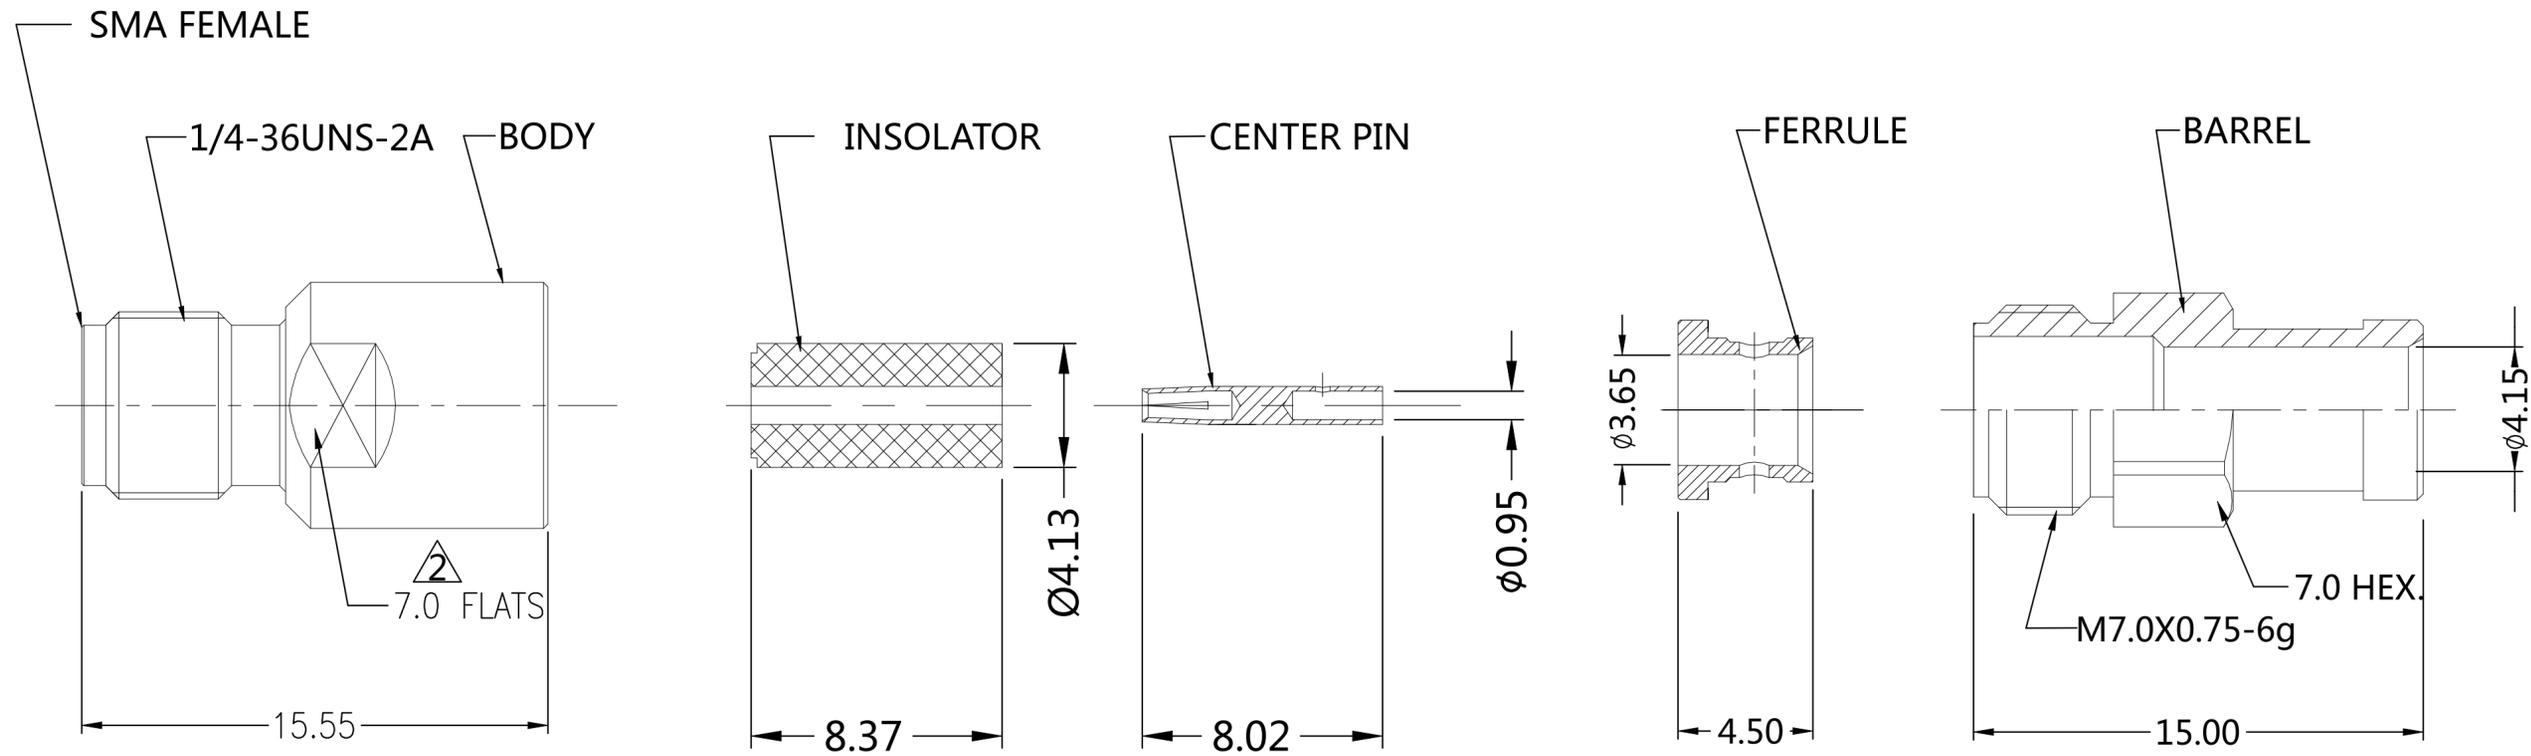


## RECOMMENDED STRIPPING DIMENSIONS

**NOTES:**

- 1 PACK IN ACCORDANCE WITH TE SPEC 107-3275
- 2 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED
- 3 GOLD PLATING 0.254um MIN OVER NIKEL PLATING 1.27um MIN OVER COPPER PLATING 1.27um MIN
- 4 GOLD PLATING 0.762um MIN OVER NIKEL PLATING 1.27um MIN OVER COPPER PLATING 1.27um MIN

**USE METAL GASKETS TO ENSURE THIS REQUIREMENT**

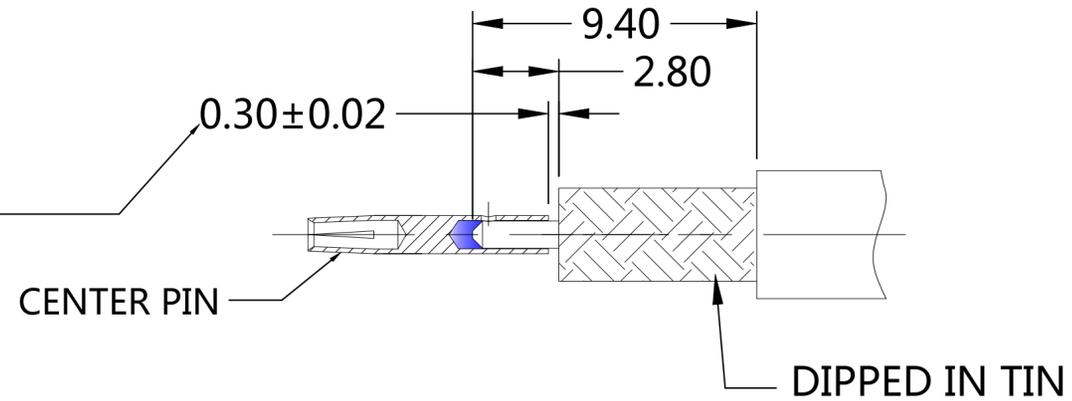

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Impedance (Ohm) _50	Interface Dimension MIL-STD-348B Fig. _310-2	TEMPERATURE RANGE -65°C TO + 165°C
Frequency Range (GHz) _DC to 27GHz	Recommended Coupling Torque _7 to 10 In-Lbs	THERMAL SHOCK _MIL-STD-202, METH.107, COND.B
Voltage Rating (Peak) @ Sea Level _335 V RMS	Force to Engage and Disengage (In/lbs) _2.0 MAX	CORROSION _MIL-STD-202, METH.101, COND.B
Insulation Resistance (MIN.) _5000 M ohms	Center Contact Captivation Axial (Lbs) _6.0 Radial (In/Oz) _N/A	VIBRATION _MIL-STD-202, METH.204, COND.D
Contact Resistance (Milliohms MAX) Center Contact _3.0 Outer Contact _2.0	Cable Retention Axial (Lbs) _N/A	SHOCK _MIL-STD-202, METH.213, COND.I
Dielectric Withstand Voltage: _750 V RMS Max	Mating cycles _500 cycles	MOISTURE RESISTANCE _MIL-STD-202, METH.106.
Insertion Loss : _0.1*SQRT(F) dB		ROHS _COMPLIANT
VSWR: _1.3 MAX (DC-27GHz)		
RF leakage: _N/A		
3rd Intermodulation: _N/A		


QUANTITY PER ASSY	PARTS LIST
1	PASSIVATION STAINLESS STEEL BARREL 5
1	3 BRASS FERRULE 4
1	/ PTFE INSULATOR 3
1	4 BeCu CENTER CONTACT 2
1	PASSIVATION STAINLESS STEEL BODY 1
2081887-1	PLATING MATERIAL DESCRIPTION ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ED 29DEC2020	TE Connectivity	
DIMENSIONS: mm		CHK RZ 29DEC2020		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD WH 29DEC2020	NAME	
0 PLC ± -	1 PLC ± 0.3	PRODUCT SPEC	EP-SMA,JACK,STRAIGHT,27GHz,	
2 PLC ± 0.2	3 PLC ± 0.1	APPLICATION SPEC	SOLDER,MATCH WITH 141 CABLE	
4 PLC ± -	ANGLES ± 5°		SIZE	CAGE CODE
MATERIAL SEE TABLE	FINISH -	WEIGHT 5.8g	A2	00779
		CUSTOMER DRAWING	DRAWING NO	RESTRICTED TO
		SCALE 10:1	C=2081887	-
		SHEET 1 of 2	REV A	


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

# EP-SMA CONNECTOR(2081887-1) INSTALLATION MANUAL


1. A. Strip the cable according to the size shown in the left drawing.  
be careful not to cut into the outer shield.
- B. Soak the outer shield of the cable in tin.
- C. After leaching, peel off the center conductor and proceed with the center conductor C0.10 chamfering, and finally the remaining sheath and outer shielding remove from the central conductor. place the sleeve over the cable.Remove from the central conductor.
- D. Place the sleeve over the cable.

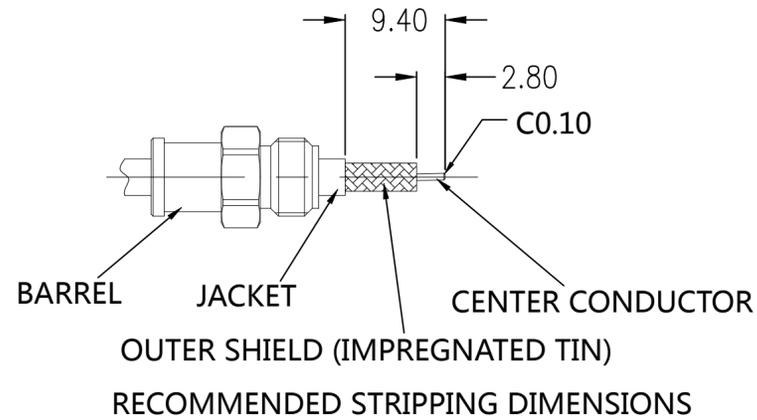


2. A. As shown in the left figure, put the welding cup on the outer shielding layer of the cable first.
- B. When welding the cup, control the end surface of the cup with a fixture parallel to the outer shielding end face of the cable.
- C. Control welding time and temperature, and remove excess with tools make sure the surface of the solder cup is smooth and clean when the solder cup is spilled excess residue in welding area.

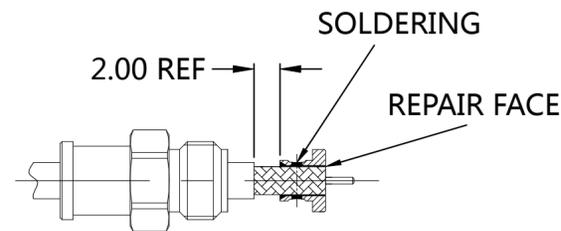

- 3.A. As shown in the figure below, solder cable inner conductor with the center pin. but please leave 0.3mm gap between cable inner conductor and center pin.
- B. Control the welding time and temperature, and remove the excess with tools spill the tin spots, make sure the center needle surface is smooth, then clean the welding area of excess residue.excess residue in welding area.

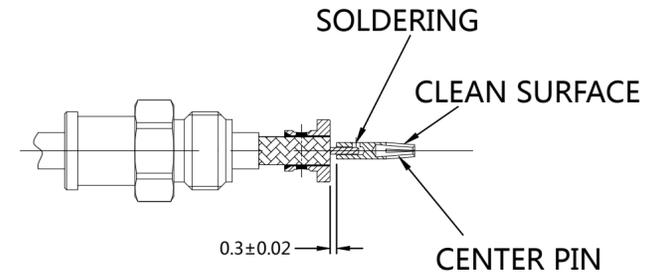

- 4.A. Insert the cable into the main body until it reaches the end face of the insulator on the cable contact with the insulator step inside the main body and cannot be pushed until.
- B. As shown in the left figure, screw the sleeve into the main body and tighten it. clean the welding area of excess residue.excess residue in welding area.

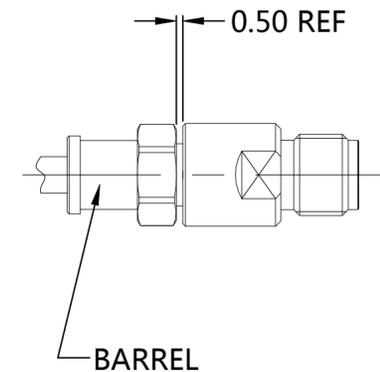

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ED 29DEC2020	TE Connectivity	
		CHK RZ 29DEC2020		
DIMENSIONS: mm		APVD WH 29DEC2020	NAME EP-SMA,JACK,STRAIGHT,27GHz, SOLDER,MATCH WITH 141 CABLE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE A2 CAGE CODE 00779 C=2081887	
0 PLC ± -		APPLICATION SPEC	DRAWING NO	
1 PLC ± 0.3			RESTRICTED TO	
2 PLC ± 0.2			SCALE 10:1 SHEET 2 OF 2 REV A	
3 PLC ± 0.1				
4 PLC ± -				
ANGLES ± 5°				
MATERIAL SEE TABLE		FINISH -		
		WEIGHT -		
		CUSTOMER DRAWING		