

ELECTRICAL SPECIFICATIONS:

1.0 TURNS RATIO: (P6-P5-P4) : (J6-J3) (P3-P2-P1) : (J2-J1) : 1CT : 1CT± 3%

: 1CT : 1.41CT ± 3%

NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

2.0 INDUCTANCE: (P6-P4)

(P3-P1)

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bigs

3.0 LEAKAGE INDUCTANCE: P6-P4 (WITH J6 AND J3 SHORT) : 0.3uH MAX. @ 1MHz P3-P1 (WITH J2 AND J1 SHORT) : 0.3uH MAX. @ 1MHz

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3) (P3,P2,P1) TO (J2,J1) : 30pf TYP. @ 1MHz : 30pf TYP. @ 1MHZ

5.0 DC RESISTANCE: (J6-J3)=(J2-J1): 1.2 ohms Max.



Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199

717.234.7512

http://www.stewartconnector.com

http://www.stewartconnector.com

SHEET 1 OF 4 DRAWING NO.

SI-60101-F

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

RECEIVE <u>TRANSMIT</u> 6.0 RETURN LOSS: 1MHz TO 30MHz 12dB MIN. : 18dB MIN. 60MHz TO 80MHz : 12dB MIN. NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3). 7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P3) : 1500 VAC 1500 VAC (J3, J6) TO (P4,P6) : 1500 VAC 1500 VAC 8.0 INSERTION LOSS: RS=RL=100 ohms 100KHz TO 100MHz : 1.1 dB TYP 1.1 dB TYP 9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS OUTPUT VOLTAGE = 1 V peak: 3.0 nS MAX 3.0 nS MAX PULSE WIDTH= 112nS : 3.0 nS MAX 3.0 nS MAX 10.0 CROSS TALK: 1MHz TO 100MHz : 40 dB TYP 40 dB TYP

> Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

MagJack

http://www.stewartconnector.com

N CONTENT SHEET

NDING 2 OF 4

35dB TYP


DRAWING NO.


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART ONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.


11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz : 35dB TYP

SI-60101-F

1-F | "05





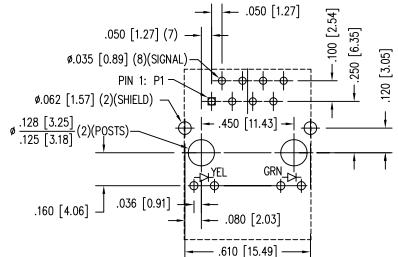



IFD POLARITY (ENLARGED VIEW)

SINGLE COLOR LED

P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE

ALL CENTERLINE DIMENSIONS ARE BASIC.





| LED SPECIFICATION | | | |
|-------------------|------------|-----------------|--------|
| STANDARD LED | WAVELENGTH | Forward V (MAX) | *(TYP) |
| GREEN | 565 nm | 2.5 V | 2.2 V |
| YELLOW | 590 nm | 2.5 V | 2.1 V |

*WITH A FORWARD CURRENT OF 20 mA (TYP)



1. CONNECTOR MATERIALS: HOUSING: THERMOPLASTIC UL94 V-0 CONTACT/SHIELD: COPPER ALLOY SHIELD PLATING: NICKEL OR TIN CONTACT PLATING: SELECTIVE GOLD

50 MICRO-INCHES MIN. IN CONTACT AREA.

ROHS 2002/95/EC

- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- 4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- 5. WAVE SOLDER COMPATIBLE PREHEAT 125°C/90SECS.

Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199

http://www.stewartconnector.com


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART ONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING


SHEET

717.234.7512

DRAWING NO.

REV. SI-60101-F 3 OF 4

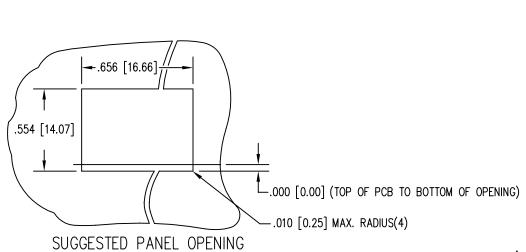



- 1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
- 2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]

Bel Stewart Connector 11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512 MagJack

http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET DRAWING NO.

WING NO. SI-60101-F

[™] 10