


Amplified Low Pressure Sensors

1 mbar (0.4 ln H₂O) to 60 ln H₂O Pressure Sensors

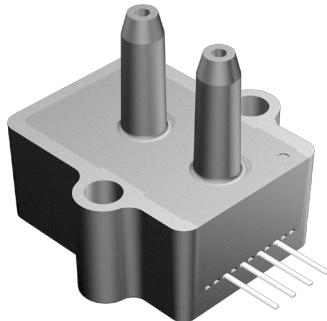

Features

- 0 to 1 mbar to 0 to 60 ln H₂O Pressure Ranges
- Ratiometric 4V Output
- Temperature Compensated
- Calibrated Zero and Span

Applications

- Medical Instrumentation
- Environmental Controls
- HVAC


General Description

The Amplified line of low pressure sensors are based upon a proprietary technology to reduce all output offset or common mode errors. This model provides a ratiometric 4-volt output with superior output offset characteristics. Output offset errors due to change in temperature, stability to warm-up, stability to long time period, and position sensitivity are all significantly reduced when compared to conventional compensation methods. In addition the sensor utilizes a silicon, micromachined, stress concentration enhanced structure to provide a very linear output to measured pressure.


These calibrated and temperature compensated sensors give an accurate and stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like.

The output of the device is ratiometric to the supply voltage over a supply voltage range of 4.5 to 5.5 volts.


Physical Dimensions

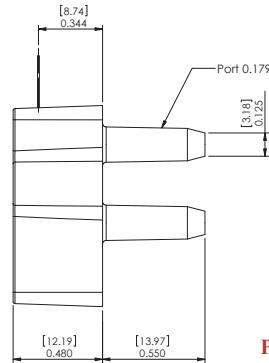

Pinout:
Pin 1: Vs
Pin 2: Gnd
Pin 3: Vout
Pin 4: Do Not Connect

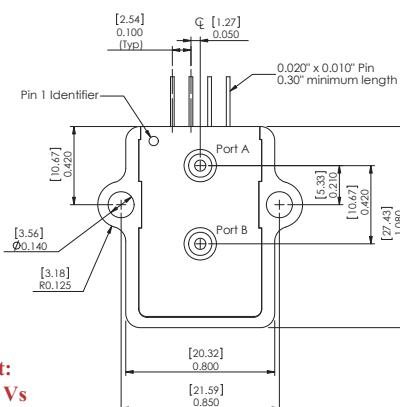

Equivalent Circuit

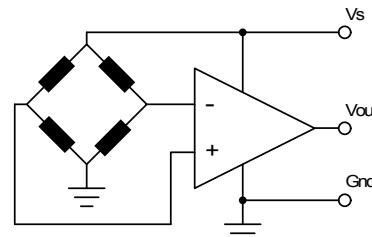

Approvals

MKT	DATE	MFG	DATE	ENG	DATE	QA	DATE
<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change	

Pressure Sensor Ratings		Environmental Specifications	
Supply Voltage VS	+4.5 to +5.5 Vdc	Temperature Ranges	
Common-mode pressure	-10 to +10 psig	Compensated	5 to 50° C
Lead Temperature, max (soldering 2-4 sec.)	250°C	Operating	-25 to 85° C
		Storage	-40 to 125° C
		Humidity Limits	0 to 95% RH (non condensing)

Standard Pressure Ranges

Part Number	Operating Pressure	Nominal Span	Proof Pressure	Burst Pressure
1 MBAR-D-4V	±1 mbar	4 V	100 lnH2O	200 lnH2O
1 INCH-D-4V	±1 lnH2O	4 V	100 lnH2O	200 lnH2O
1 INCH-G-4V	0 - 1 lnH2O	4 V	100 lnH2O	200 lnH2O
2.5 INCH-D-4V	±2.5 lnH2O	4 V	200 lnH2O	300 lnH2O
2.5 INCH-G-4V	0 - 2.5 lnH2O	4V	200 lnH2O	300 lnH2O
5 INCH-D-4V	±5 lnH2O	4 V	200 lnH2O	300 lnH2O
5 INCH-G-4V	0 - 5 lnH2O	4 V	200 lnH2O	300 lnH2O
10 INCH-D-4V	±10 lnH2O	4 V	200 lnH2O	300 lnH2O
10 INCH-G-4V	0 - 10 lnH2O	4 V	200 lnH2O	300 lnH2O
20 INCH-D-4V	±20 lnH2O	4 V	300 lnH2O	500 lnH2O
20 INCH-G-4V	0 - 20 lnH2O	4 V	300 lnH2O	500 lnH2O
30 INCH-D-4V	±30 lnH2O	4 V	500 lnH2O	800 lnH2O
30 INCH-G-4V	0 - 30 lnH2O	4V	500 lnH2O	800 lnH2O
40 INCH-G-4V	0 - 40 lnH2O	4V	500 lnH2O	800 lnH2O
60 INCH-G-4V	0 - 60 lnH2O	4V	500 lnH2O	800 lnH2O

Performance Characteristics for: 1 MBAR-D-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±1.0		mbar
Output Span, NOTE 5	±1.80	±2.0	±2.20	V
Offset Voltage @ zero differential pressure	2.00	2.25	2.50	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±120	mV
Offset Warm-up Shift, NOTE 3		±20		mV
Offset Position Sensitivity (±1g)		±40		mV
Offset Long Term Drift (one year)		±20		mV
Linearity, hysteresis error, NOTE 4	0.05	0.25		%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±4	%FSS

Performance Characteristics for 1 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±1.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±10		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±10		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±2	%FSS

all sensors

Performance Characteristics for 1 INCH-G-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		1.0		inH2O
Output Span, note 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±10		mV
Offset Position Sensitivity (±1g)		±15		mV
Offset Long Term Drift (one year)		±10		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±2	%FSS

e www.allsensors.com
f 408 225 2079
p 408 225 4314

Performance Characteristics for 2.5 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±2.5		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±2	%FSS

a 16035 Vineyard Blvd. Morgan Hill, CA 95037

Performance Characteristics for 2.5 INCH-G-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		2.5		inH2O
Output Span, note 5	3.90	4.0	4.10	V
Offset Voltage @ zero gage pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±2	%FSS

Performance Characteristics for 5 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±5.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±40	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±1	%FSS

Performance Characteristics for: 5 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		5.0		inH2O
Output Span, NOTE 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±40	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

Performance Characteristics for: 10 INCH-D-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±10.0		inH2O
Output Span, NOTE 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

all sensors

p 408 225 4314 f 408 225 2079 e www.allensors.com

Performance Characteristics for: 10 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		10.0		inH2O
Output Span, NOTE 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

a 16035 Vineyard Blvd. Morgan Hill, CA 95037

Performance Characteristics for 20 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±20.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±1	%FSS

Performance Characteristics for 20 INCH-G-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		20.0		inH2O
Output Span, note 5	3.90	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±1	%FSS

Performance Characteristics for 30 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±30.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), note 2			±1	%FSS

Performance Characteristics for 30 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		30.0		inH2O
Output Span, NOTE 5	3.9	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05		0.25	%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

Performance Characteristics for 40 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		40.0		inH2O
Output Span, NOTE 5	3.9	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05	0.25		%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

Performance Characteristics for 60 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		60.0		inH2O
Output Span, NOTE 5	3.9	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4	0.05	0.25		%FSS
Span Temperature Shift (5°C-50°C), NOTE 2			±1	%FSS

Pressure Response: for any pressure applied the response time to get to 90% of pressure applied is typically less than 500 useconds.

Specification Notes

NOTE 1: ALL PARAMETERS ARE MEASURED AT 5.0 VOLT EXCITATION, FOR THE NOMINAL FULL SCALE PRESSURE AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B.

NOTE 2: SHIFT IS RELATIVE TO 25°C.

NOTE 3: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 4: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 5: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE OUTPUT VOLTAGE AND THE OFFSET VOLTAGE.

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

all sensors

p 408 225 4314 f 408 225 2079 e www.allensors.com

a 16035 Vineyard Blvd. Morgan Hill, CA 95037