

# SPECIFICATION CONTROL DRAWING


**55/1842**

TITLE FOUR CONDUCTOR CABLE, SHIELDED, JACKETED, OUTER SPACE, 600 VOLT

Date 4-11-11

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

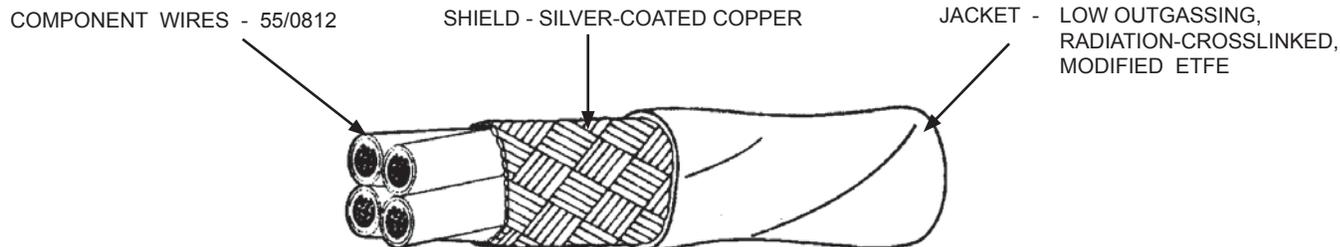

CABLE CONSTRUCTION DETAILS							
PART NUMBER <i>1/</i>	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/1842-26-*	26	38	.006	.008	.130	.150	14.7
55/1842-24-*	24	38	.006	.008	.142	.165	18.0
55/1842-22-*	22	38	.006	.008	.154	.179	22.5
55/1842-20-*	20	38	.006	.008	.173	.202	30.0
55/1842-18-*	18	38	.006	.008	.202	.237	42.2
55/1842-16-*	16	38	.007	.009	.221	.259	51.4
55/1842-14-*	14	38	.007	.009	.262	.308	74.0
55/1842-12-*	12	38	.007	.009	.304	.357	104.

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms) at sea level  
 CROSSLINKED VERIFICATION: 300 ± 3°C for 1 hour  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 JACKET COLOR: White preferred  
 JACKET ELONGATION: 50% (minimum)  
 JACKET FLAWS:  
   Spark Test, 1000 volts (rms)  
   Impulse Dielectric Test, 6.0 kV (peak)

RADIATION RESISTANCE: 500 megarads  
 SHIELD COVERAGE: 85% (minimum)  
 VACUUM STABILITY:  
   Total Mass Loss (TML), 1.00% (maximum)  
   Volatile Condensable Material (VCM), 0.10% (maximum)  
 VOLTAGE WITHSTAND (Post Environmental):  
   1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.

NOTE: Nominal values are for information only.  
 Nominal values are not requirements.

*1/* Example: AWG 24, black, brown, red and orange component wires;  
 white jacket: 55/1842-24-0/1/2/3-9

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.		
1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.		
Page 1 of 1	The TE (logo), TE Connectivity, TE connectivity (logo) and Raychem are trademarks. DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL. THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.	<p style="font-size: x-small; margin-top: 5px;">                     Raychem Wire &amp; Cable                      501 Oakside Avenue                      Redwood City, CA 94063-3800                      Phone: 1-800-227-8816                      Fax: 1-650-361-6297                 </p>