

STRADA-SQ-T4

IESNA Type IV beam for wider roads and large outdoor areas. Version with location pins. Assembly with installation tape.


TECHNICAL SPECIFICATIONS:

Dimensions	25.0 mm
Height	9.4 mm
Fastening	tape, pin, screw
Colour	clear
Box size	
Box weight	7.6 kg
Quantity in Box	pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour
STRADA-SQ-T4	Single lens	PMMA	clear
ROSE-TAPE	Tape	PU tape	black

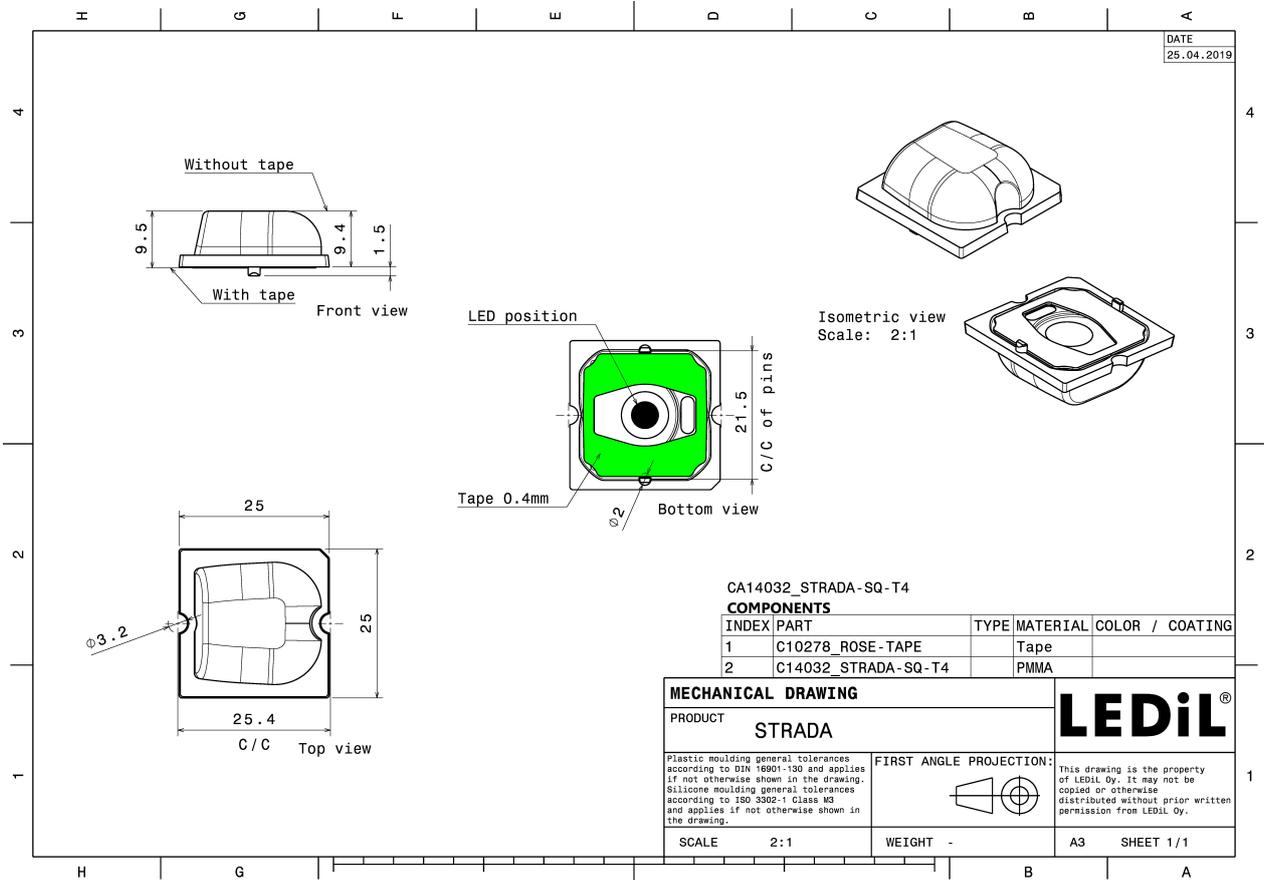


PHOTOMETRIC DATA (MEASURED):




LED MK-R
 FWHM Asymmetric
 Efficiency 92 %
 Peak intensity 0.480 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

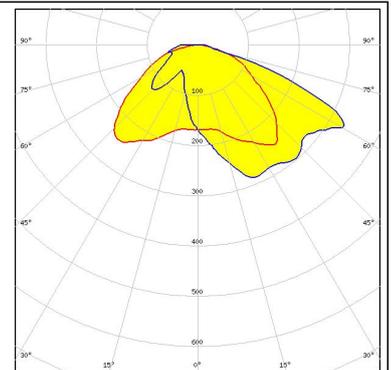


LED XHP50
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

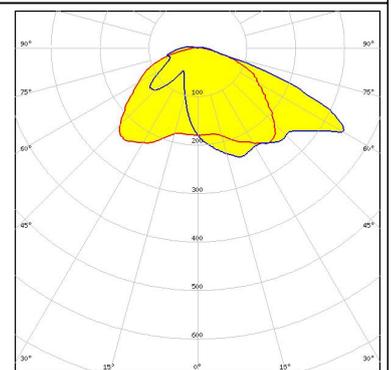

LED LUXEON M/MX
 FWHM Asymmetric
 Efficiency 92 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

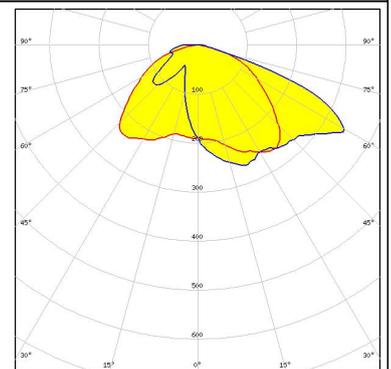


LED LUXEON MZ
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.670 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

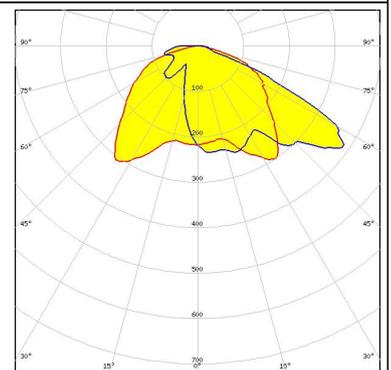

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON TX
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.710 cd/lm
LEDs/each optic 1
Light colour White
Required components:

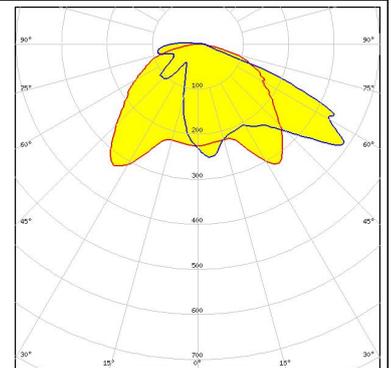


LUMILEDS

LED LUXEON XR-M linear 1x3, 1x4, 1x5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.570 cd/lm
LEDs/each optic 1
Light colour White
Required components:

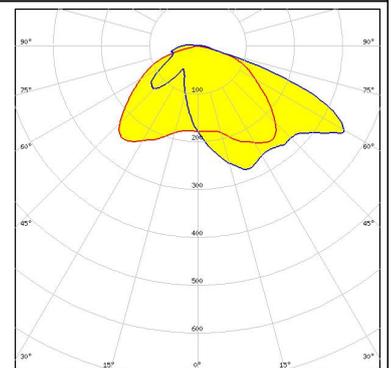


NICHIA

LED NV4x144A
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.550 cd/lm
LEDs/each optic 1
Light colour White
Required components:

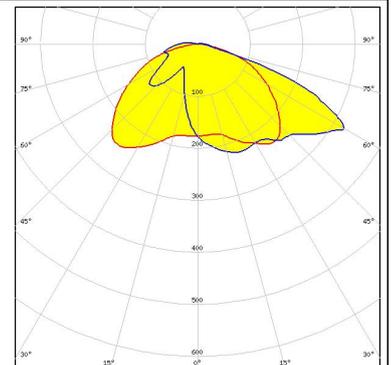

NICHIA


LED NVSW319B
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.680 cd/lm
LEDs/each optic 1
Light colour White
Required components:

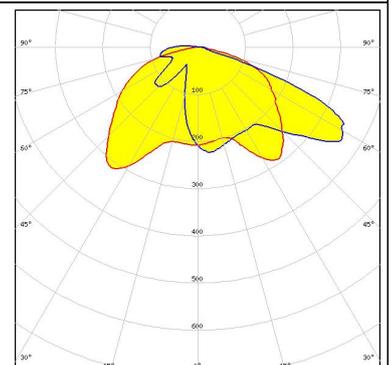

PHOTOMETRIC DATA (MEASURED):


OSRAM Opto Semiconductors

LED Duris S10
 FWHM Asymmetric
 Efficiency 91 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

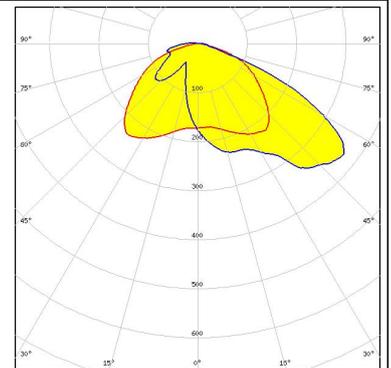


OSRAM Opto Semiconductors

LED Duris S8
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

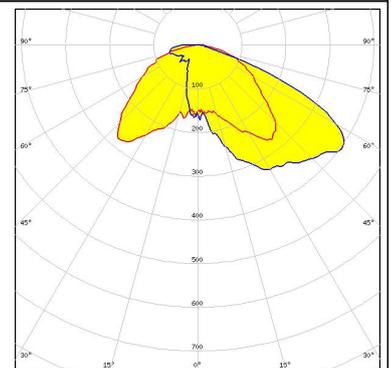

SEOUL SEMICONDUCTOR


LED Z8Y50P
 FWHM Asymmetric
 Efficiency 89 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

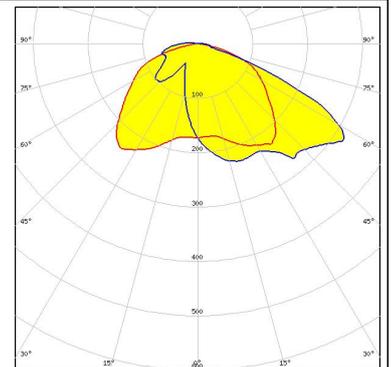


PHOTOMETRIC DATA (SIMULATED):




LED MHB-A/B
 FWHM Asymmetric
 Efficiency 92 %
 Peak intensity 0.480 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

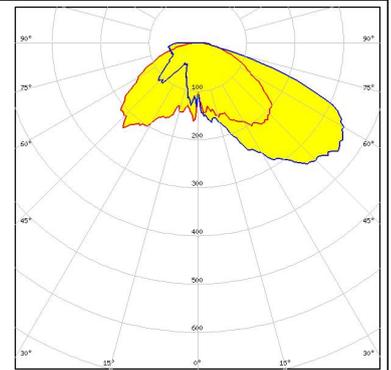


LED XM-L2
 FWHM Asymmetric
 Efficiency 95 %
 Peak intensity 0.587 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

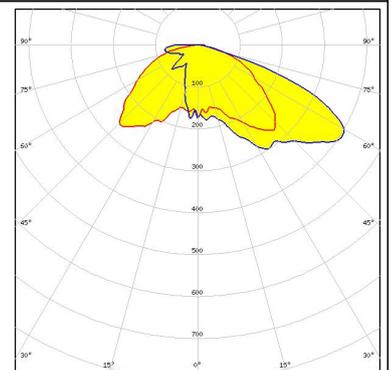

LED LUXEON 5050 Round LES
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

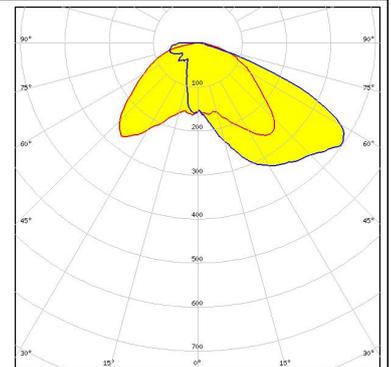


LED NVSxx19B/NVSxx19C
 FWHM Asymmetric
 Efficiency 92 %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

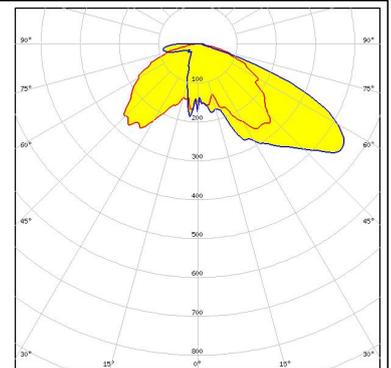

PHOTOMETRIC DATA (SIMULATED):


OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (2W version)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.650 cd/lm
LEDs/each optic 1
Light colour White
Required components:

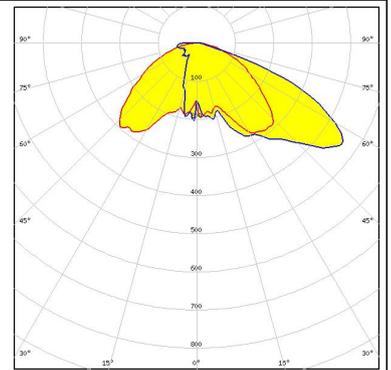

OSRAM Opto Semiconductors

LED OSCONIQ P 7070
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.580 cd/lm
LEDs/each optic 1
Light colour White
Required components:

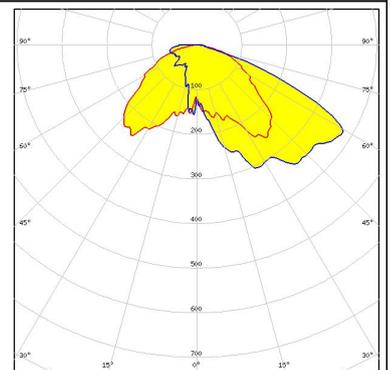

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)