
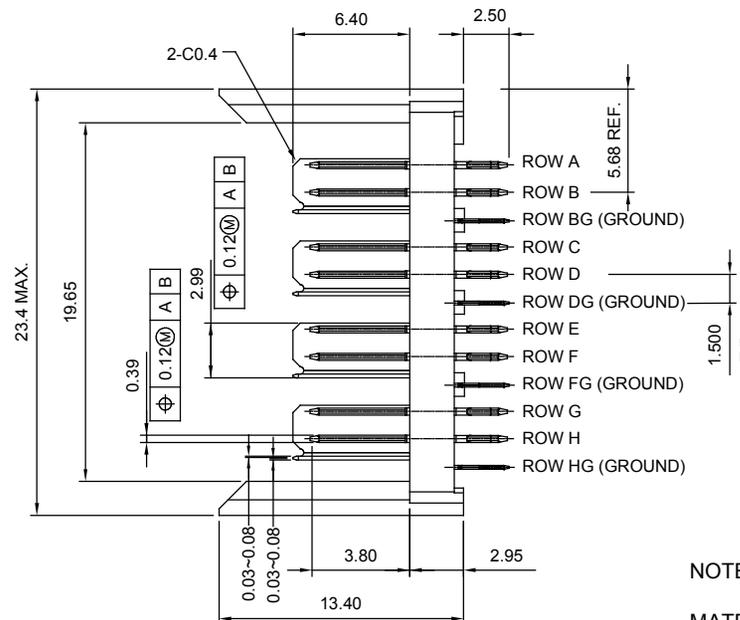




TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.15
.XXX	±0.10

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.
UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.2 MM.

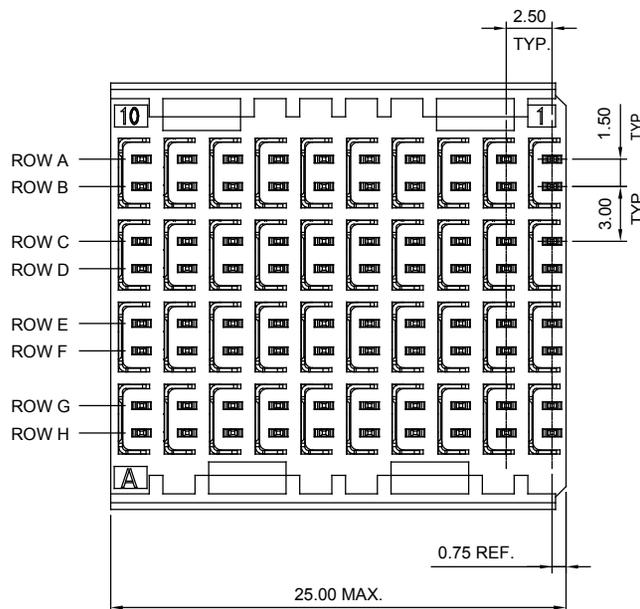

NOTES:

- MATERIAL: LCP+30% GLASS REINFORCED, UL94V-0
 HOUSING: PHOSPHOR BRONZE
 SHIELD: NICKEL PLATING
 CONTACT: PHOSPHOR BRONZE
 GOLD FLASH PLATING ON CONTACT AREA
 MATTE TIN PLATING ON SOLDER TAIL OVER
 NICKEL UNDER PLATING

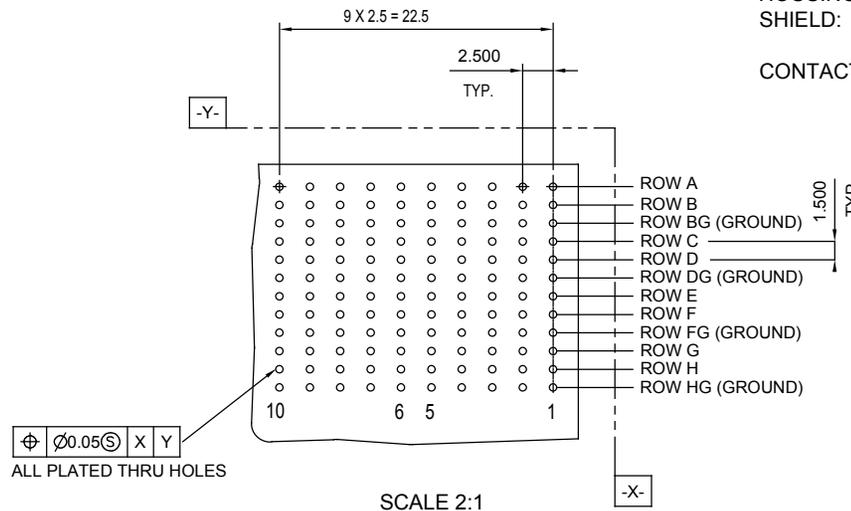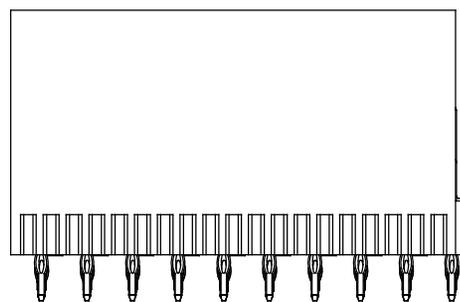

PCB HOLE DIM:
DRILLED HOLE = 0.700±0.025mm
FINISHED HOLE = 0.600±0.050mm
Cu THICKNESS = 0.0375±0.0125mm
SnPb THICKNESS = 0.007±0.003mm

SCALE 2:1

ZD CONNECTOR, MALE, VERTICAL, 4 PAIR		ACAD REFERENCE NO.: 500-080-231-B01	
		DRAWN: W.T	DATE: JUNE.27 /2018
EDAC EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE		CHECKED:	
		DATE:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		SCALE: N.T.S	SHEET 1 OF 1
		DRAWING NUMBER: 500-080-231-B01	ISSUE 1
		PART NUMBER: 500-080-231-B01	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.