


## Wire-wound Chip Power Inductors (CB series)[CBMF]

## CBMF1608T220K

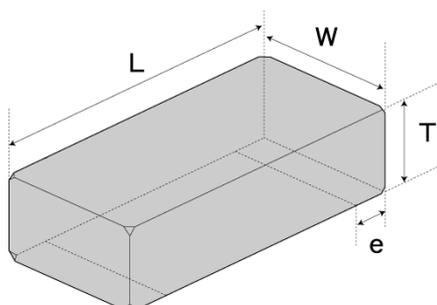

## ■ Features

- Item Summary  
22 $\mu$ H $\pm$ 10%, 70mA, 0603/1608 (EIA/JIS)
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping Embossed 3000pcs

## ■ Products characteristics table

Inductance	22 $\mu$ H $\pm$ 10 %
Case Size (EIA/JIS)	0603/1608
Rated Current (max)	70 mA
Saturation Current (max)	70 mA
Temperature Rise Current (max)	230 mA
DC Resistance (max)	1.3 $\Omega$
DC Resistance (typ)	1 $\Omega$
LQ Measuring Frequency	2.52 MHz
Self Resonant Frequency (min)	16 MHz
Operating Temp. Range	-40 to +105 $^{\circ}$ C (Including-self-generated heat)
Temperature characteristic (Inductance change)	$\pm$ 25 %
RoHS2 Compliance (10 subst.)	Yes
REACH Compliance (173 subst.)	Yes
Halogen Free	Yes
Soldering	Reflow

## ■ External Dimensions

Dimension L	1.6 $\pm$ 0.2 mm
Dimension W	0.8 $\pm$ 0.2 mm
Dimension T	0.8 $\pm$ 0.2 mm
Dimension e	0.45 $\pm$ 0.15 mm

2017.05.02

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
 Before making final selection, please check product specification.




Wire-wound Chip Power Inductors (CB series)

CBMF1608T220K



Dimension	unit : mm	unit : inch
Length :	1.6 +/- 0.2	(0.063 +/- 0.008)
Width :	0.8 +/- 0.2	(0.031 +/- 0.008)
Height :	0.8 +/- 0.2	(0.031 +/- 0.008)

Inductance :	22	uH	( test freq at 2.52MHz )
DC Resistance :	1.0 / 1.3	ohm	( typ / max )
Saturation Current :	70	mA	( max )
Temp. rise Current :	230	mA	( max )
Saturation current typical : 30% reduction from initial L value.			
Temp rise Current typical : Temperature will rise by 40 deg C			

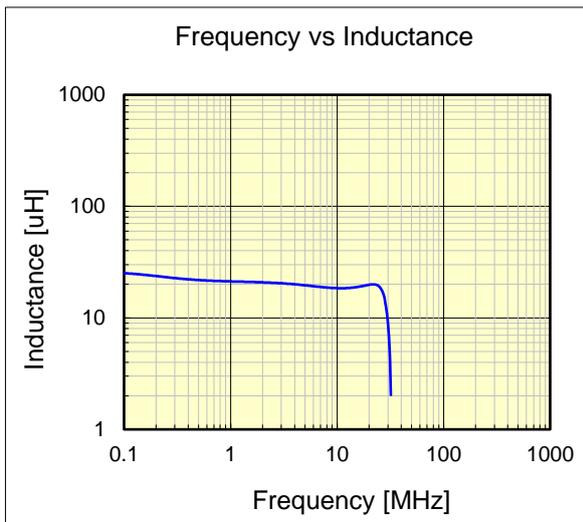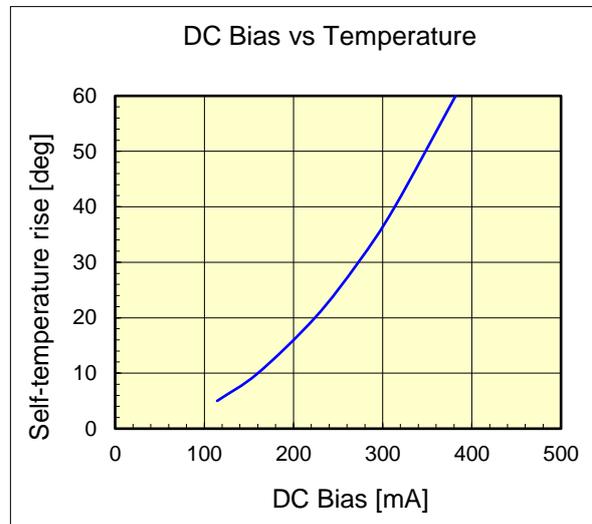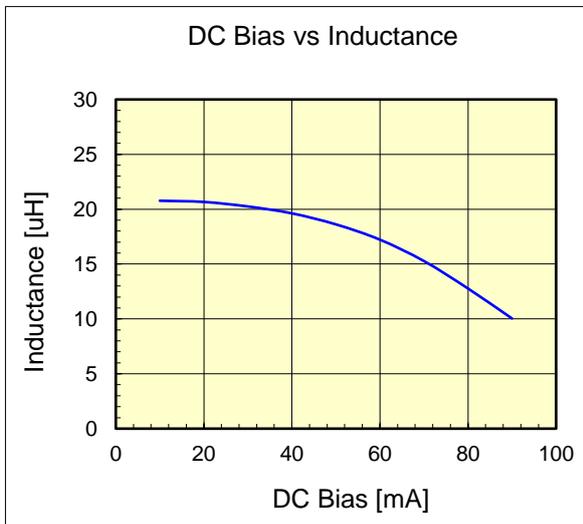

The data is reference only. Electrical characteristics vary depending on environment or measurement condition. TAIYO YUDEN reserves the right to make change to the data at any time without notice. Before making final selection, please check product specification.