

HiPerFRED²

V_{RRM} = 200 V
I_{FAV} = 2x 30 A
t_{rr} = 35 ns


High Performance Fast Recovery Diode

Low Loss and Soft Recovery


Common Cathode

Part number

DPG60C200HB

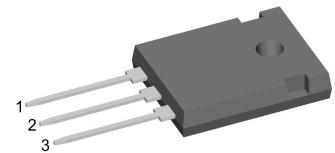

Backside: cathode

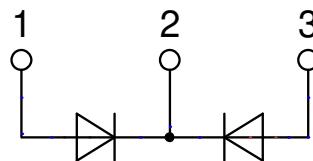

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm}-values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode

Symbol	Definition	Conditions	Ratings				
			min.	typ.	max.		
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			200	V	
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			200	V	
I_R	reverse current, drain current	$V_R = 200 \text{ V}$ $V_R = 200 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$		1 0.1	μA mA	
V_F	forward voltage drop	$I_F = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$		1.34	V	
		$I_F = 60 \text{ A}$			1.63	V	
		$I_F = 30 \text{ A}$	$T_{VJ} = 150^\circ\text{C}$		1.06	V	
		$I_F = 60 \text{ A}$			1.39	V	
I_{FAV}	average forward current	$T_C = 140^\circ\text{C}$ rectangular	$T_{VJ} = 175^\circ\text{C}$		30	A	
V_{F0}	threshold voltage	$T_{VJ} = 175^\circ\text{C}$			0.70	V	
r_F	slope resistance } for power loss calculation only				10.5	$\text{m}\Omega$	
R_{thJC}	thermal resistance junction to case				0.95	K/W	
R_{thCH}	thermal resistance case to heatsink			0.3		K/W	
P_{tot}	total power dissipation	$T_C = 25^\circ\text{C}$			160	W	
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 \text{ V}$	$T_{VJ} = 45^\circ\text{C}$		360	A	
C_J	junction capacitance	$V_R = 150 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$		42	pF	
I_{RM}	max. reverse recovery current	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		3		A	
t_{rr}	reverse recovery time			7		A	
					35	ns	
					55	ns	

Package TO-247

Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal ¹⁾			50	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
M_d	mounting torque		0.8		1.2	Nm
F_c	mounting force with clip		20		120	N

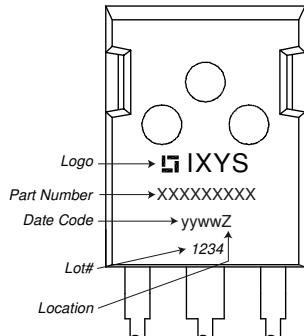Product Marking

Part description

D = Diode
P = HiPerFRED
G = extreme fast
60 = Current Rating [A]
C = Common Cathode
200 = Reverse Voltage [V]
HB = TO-247AD (3)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPG60C200HB	DPG60C200HB	Tube	30	506294

Similar Part	Package	Voltage class
DPG60C200QB	TO-3P (3)	200
DPF60C200HB	TO-247AD (3)	200
DPF60C200HJ	ISOPLUS247 (3)	200


Equivalent Circuits for Simulation
^{*}on die level

 $T_{VJ} = 175^\circ\text{C}$

	Fast Diode
$V_{0\max}$	threshold voltage
$R_{0\max}$	slope resistance *

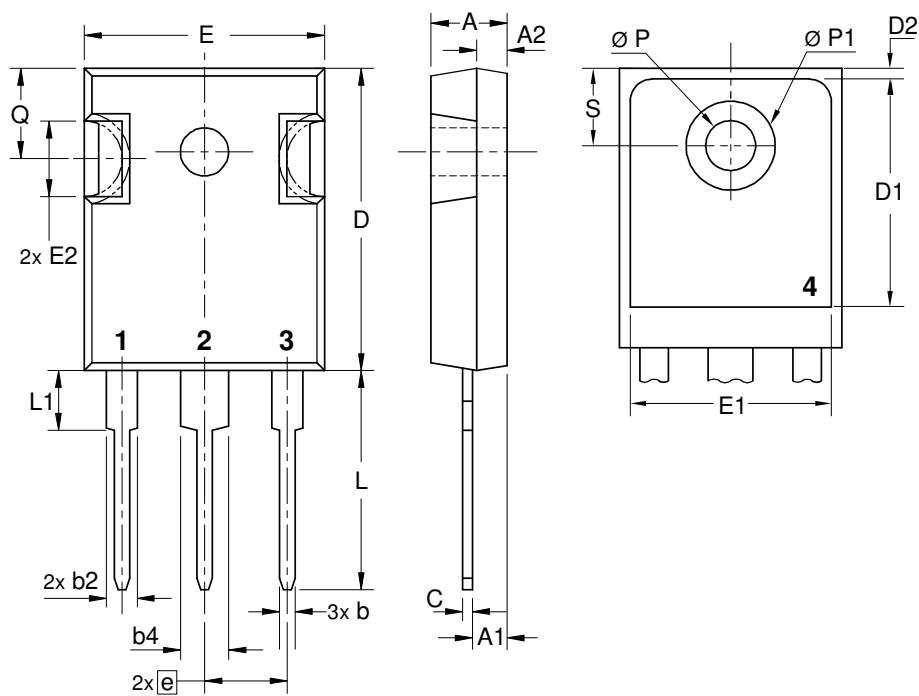Outlines TO-247


Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

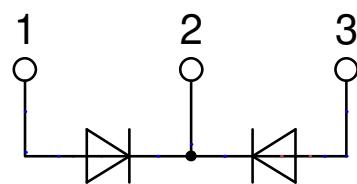

Fast Diode

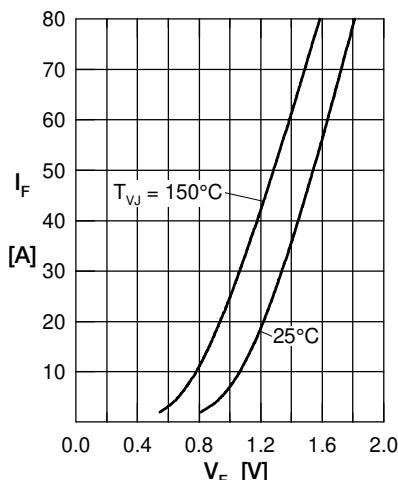


Fig. 1 Forward current
 I_F versus V_F

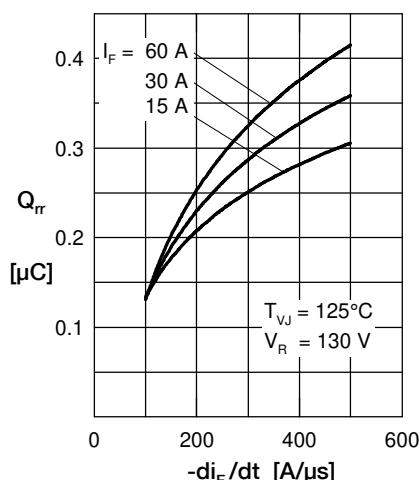


Fig. 2 Typ. reverse recov. charge
 Q_{rr} versus $-di_F/dt$

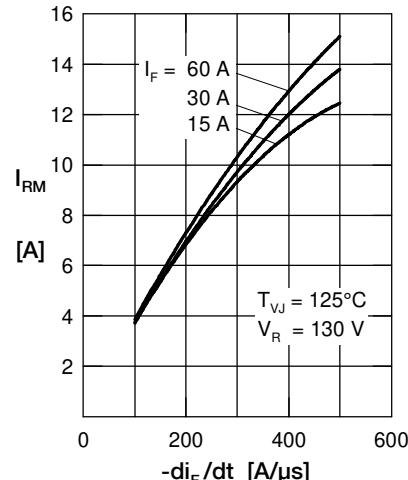


Fig. 3 Typ. reverse recov. current
 I_{RM} versus $-di_F/dt$

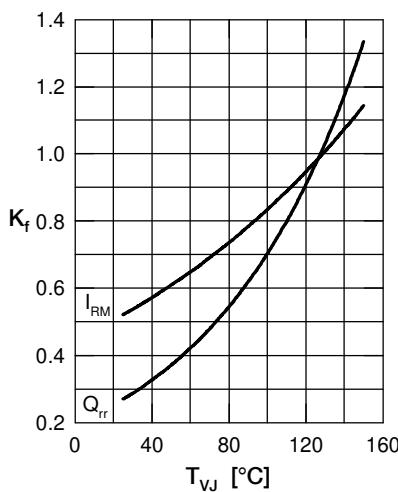


Fig. 4 Typ. dynamic parameters
 Q_{rr} , I_{RM} versus T_{VJ}

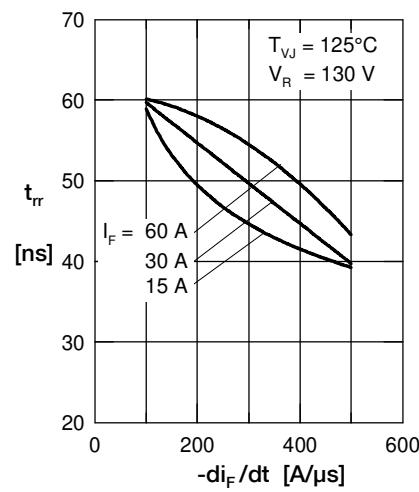


Fig. 5 Typ. reverse recov. time
 t_{rr} versus $-di_F/dt$

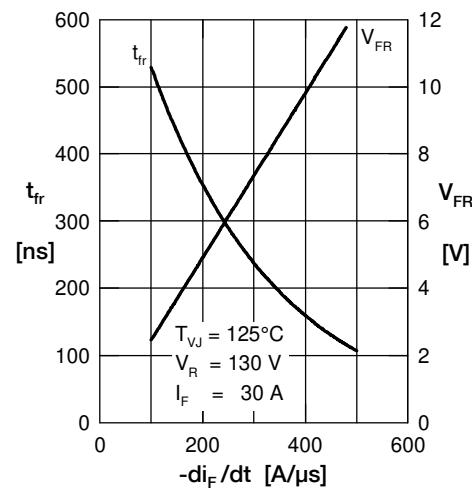


Fig. 6 Typ. forward recov. voltage
 V_{FR} and t_{fr} versus di_F/dt

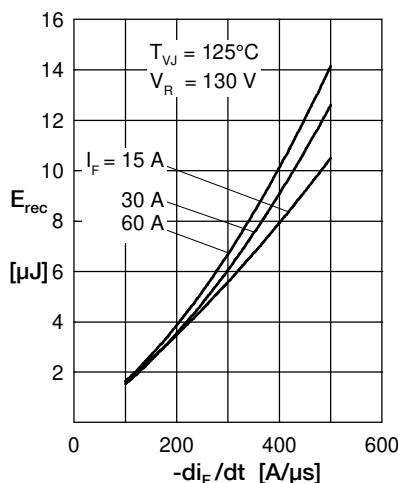


Fig. 7 Typ. recovery energy
 E_{rec} versus $-di_F/dt$

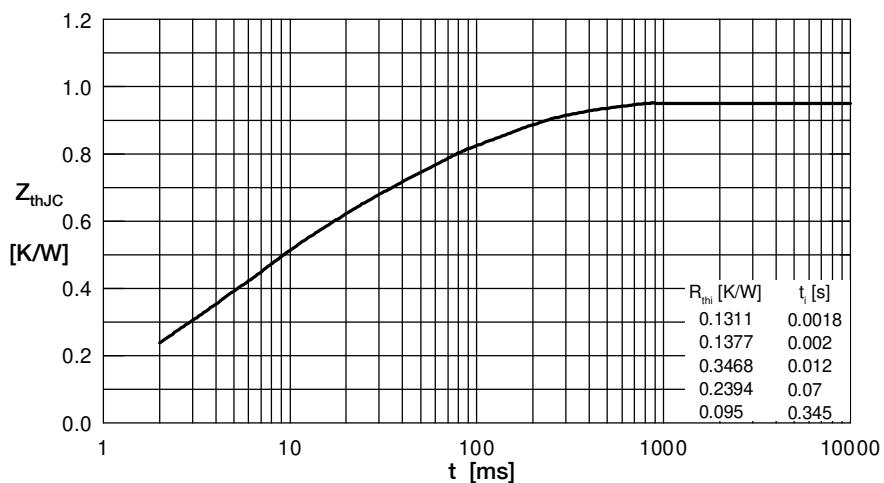


Fig. 8 Transient thermal impedance junction to case