
Data sheet | Item number: 706-150/334-200

Connection cable; 34-pole; Pluggable connector per DIN 41651; 34-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²



www.wago.com/706-150/334-200

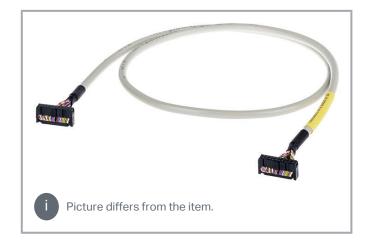

Color coding acc. to DIN VDE 47100		34 poles flat connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26
Grey-Green		27
Yellow-Grey		28
Pink-Green		29
Yellow-Pink		30
Green-Blue		31
Yellow-Blue		32
Green-Red		33
Yellow-Red		34

Data Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A. $\,$

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-150/334-200

www.wago.com/706-150/334-200



Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	34
Connection type 1	System
Wire cross-section	0.14 mm²
Connection type	Pluggable Connector per DIN 41651

Connection 2

Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	34
Connection type 2	System

Physical data

Cable length	2 m

Material Data

Weight	376 g	

Environmental requirements

|--|

Commercial data

ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	bag

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-150/334-200

www.wago.com/706-150/334-200



Country of origin	FR
GTIN	4055143976657
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-150/334-200 URL Download

Connection cable; 34-pole; Pluggable connector per DIN 41651; 34-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.