



CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

Radial Lead

Upgrade! NPCAP™-PSA Series

- Super low ESR, high temperature resistance and high ripple current capability
- Rated voltage range : 2.5 to 16V_{dc}
- 2,000 hours at 105°C
- Suitable for DC-DC converters, voltage regulators and decoupling applications for computer motherboards
- RoHS Compliant



◆SPECIFICATIONS



Items	Characteristics	
Category		
Temperature Range	-55 to +105°C	
Rated Voltage Range	2.5 to 16V _{dc}	
Capacitance Tolerance	±20% (M)	(at 20°C, 120Hz)
Surge Voltage	Rated voltage(V)×1.15	(at 105°C)
Leakage Current *Note	I=0.2CV (max.) Where, I : Leakage current (μ A), C : Nominal capacitance (μ F), V : Rated voltage (V _{dc})	(at 20°C after 2 minutes)
Dissipation Factor (tan δ)	0.08 max.	(at 20°C, 120Hz)
Low Temperature Characteristics	Max. impedance ratio at 100kHz to the 20°C value $Z(-25^\circ\text{C})/Z(+20^\circ\text{C}) \leq 1.15$ $Z(-55^\circ\text{C})/Z(+20^\circ\text{C}) \leq 1.25$	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial measured value
	D.F. (tan δ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to DC voltage at 60°C, 90 to 95% RH for 1,000 hours.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial measured value
	D.F. (tan δ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.	
	Appearance	No significant damage
	Capacitance change	≤±20% of the initial measured value
	D.F. (tan δ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Failure Rate	1% per 1,000 hours maximum (Confidence level 60% at 105°C)	

*Note : If any doubt arises, measure the leakage current after the following voltage treatment.

Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105°C.


◆DIMENSIONS [mm]

- Terminal Code : E

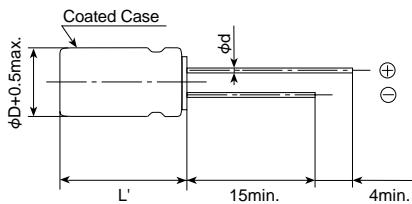


φD	6.3	8	10
φd	0.5		0.8
L'	L+0.3max		L+1.5max
F	2.5	3.5	5

◆MARKING



Upgrade!
NPCAP™-PSA Series

◆PART NUMBERING SYSTEM

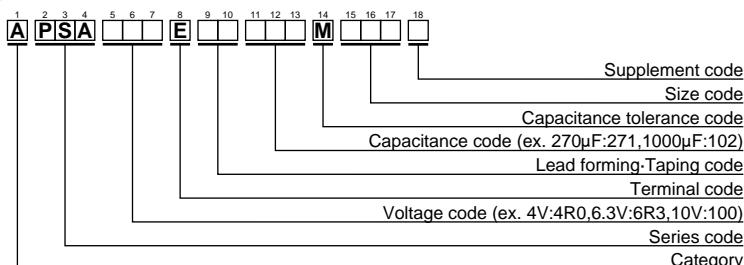

Please refer to "A guide to global code (conductive polymer type)"

◆STANDARD RATINGS

WV(Vdc)	Cap(μF)	Case size φDXL(mm)	ESR (mΩmax/20°C, 100k to 300kHz)	Rated ripple current (mAmps/105°C, 100kHz)	Part No.
2.5	390	6.3X10.5	20	3,160	APSA2R5E□□391MFA5G
	680	8X11.5	7	5,580	APSA2R5E□□681MHB5S
	820	8X11.5	7	5,580	APSA2R5E□□821MHB5S
	1,000	10X11.5	6	5,860	APSA2R5E□□102MJB5S
4	270	6.3X10.5	20	3,160	APSA4R0E□□271MFA5G
	390	6.3X10.5	24	3,300	APSA4R0E□□391MFA5G
	560	8X11.5	7	5,580	APSA4R0E□□561MHB5S
	820	10X11.5	6	5,860	APSA4R0E□□821MJB5S
6.3	220	6.3X10.5	20	3,160	APSA6R3E□□221MFA5G
	330	6.3X10.5	28	3,190	APSA6R3E□□331MFA5G
	390	8X11.5	8	5,080	APSA6R3E□□391MHB5S
	680	10X11.5	7	5,860	APSA6R3E□□681MJB5S
10	47	6.3X10.5	25	2,820	APSA100E□□470MFA5G
	68	6.3X10.5	25	2,820	APSA100E□□680MFA5G
	100	6.3X10.5	25	2,820	APSA100E□□101MFA5G
	150	6.3X10.5	25	2,820	APSA100E□□151MFA5G
	270	8X11.5	9	4,710	APSA100E□□271MHB5S
16	470	10X11.5	8	5,650	APSA100E□□471MJB5S
	100	6.3X10.5	25	2,820	APSA160E□□101MFA5G

□□ : Lead forming code and taping code