




**DIP6-pin type featuring
low on-resistance
200V/400V load voltage**

**PhotoMOS®
RF 1 Form A
Low on-resistance (AQV227N)**

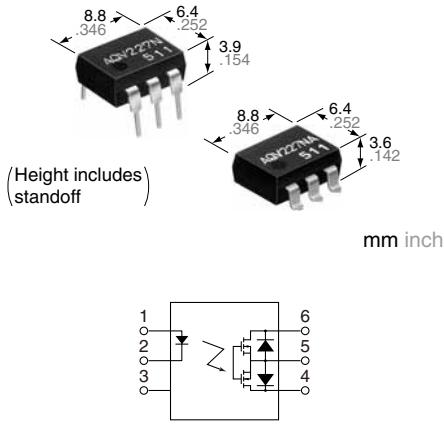

FEATURES

1. Low output capacitance and high response speed

The capacitance between output terminals is small; typ. 10pF. This enables a fast operation speed of typ. 0.2ms.

2. High sensitivity and low on-resistance

Max. 0.1 A of load current can be controlled with input current of 5 mA. The on resistance is less than our conventional models.

3. Low-level off state leakage current of typ. 0.03nA (AQV227N)

4. Controls low-level analog signals

TYPICAL APPLICATIONS

- Measuring instruments
- Communication equipment
- Computers
- Robots

RoHS compliant

TYPES

	Output rating*		Package	Part No.			Packing quantity
				Through hole terminal		Surface-mount terminal	
	Load voltage	Load current		Tube packing style		Tape and reel packing style	
AC/DC dual use			DIP6-pin	AQV227N	AQV227NA	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side
200 V	70 mA	AQV224N		AQV224NA	AQV224NAX	AQV224NAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.
400 V	50 mA						1,000 pcs.

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV227N(A)	AQV224N(A)	Remarks
Input		LED forward current	I _F		50 mA	
		LED reverse voltage	V _R		5 V	
		Peak forward current	I _{FP}		1 A	f = 100 Hz, Duty factor = 0.1%
		Power dissipation	P _{in}		75 mW	
Output		Load voltage (peak AC)	V _L	200 V	400 V	
		Continuous load current	I _L	A	0.07 A	A connection: Peak AC, DC B, C connection: DC
				B	0.08 A	
		Peak load current	I _{peak}	C	0.10 A	
Total power dissipation		P _{out}		0.21 A	0.15 A	A connection: 100 ms (1 shot), V _L = DC
I/O isolation voltage		V _{iso}		360 mW		
Temperature limits		T _{opr}		410 mW		
		T _{stg}		1,500 V AC		Non-condensing at low temperatures
				-40°C to +85°C -40°F to +185°F		
				-40°C to +100°C -40°F to +212°F		


RF 1 Form A Low on-resistance (AQV22ON)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV227N(A)	AQV224N(A)	Remarks
Input	LED operate current	Typical	I_{Fon}	—	0.9 mA	$I_L = \text{Max.}$
		Maximum			3.0 mA	
	LED turn off current	Minimum	I_{Foff}	—	0.4 mA	$I_L = \text{Max.}$
		Typical			0.85 mA	
Output	LED dropout voltage	Typical	V_F	—	1.25 V (1.14 V at $I_F = 5 \text{ mA}$)	$I_F = 50 \text{ mA}$
		Maximum			1.5 V	
	On resistance	Typical	R_{on}	A	30 Ω	30 Ω
		Maximum			50 Ω	100 Ω
		Typical	R_{on}	B	16 Ω	55 Ω
		Maximum			25 Ω	70 Ω
	Output capacitance	Typical	C_{out}	—	8 Ω	28 Ω
		Maximum			12.5 Ω	35 Ω
Transfer characteristics	Off state leakage current	Typical	I_{Leak}	—	10 pF	$I_F = 0$ $V_B = 0$ $f = 1 \text{ MHz}$
		Maximum			15 pF	
	Turn on time**	Typical	T_{on}	—	0.03 nA	0.09 nA
		Maximum			10 nA (1 nA or less)*	$I_F = 0$ $V_L = \text{Max.}$
Transfer characteristics	Turn off time**	Typical	T_{off}	—	0.08 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum			0.2 ms	
	I/O capacitance	Typical	C_{iso}	—	0.8 pF	$f = 1 \text{ MHz}$ $V_B = 0$
		Maximum			1.5 pF	
	Initial I/O isolation resistance	Minimum	R_{iso}	—	1,000 MΩ	500 V DC

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

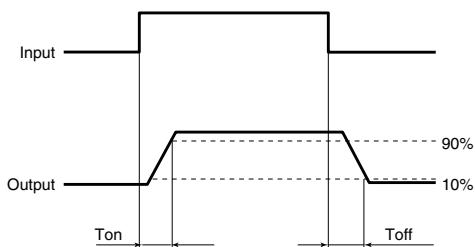

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	5	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A

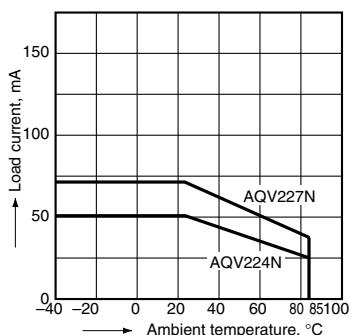


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

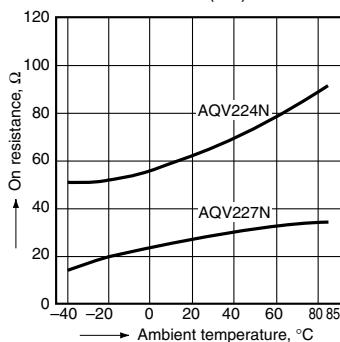


3. Turn on time vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

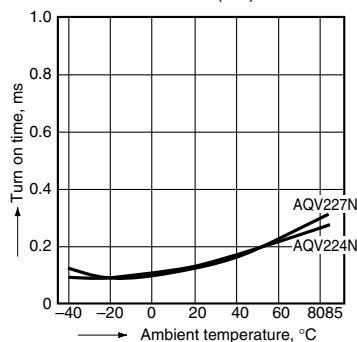


4. Turn off time vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

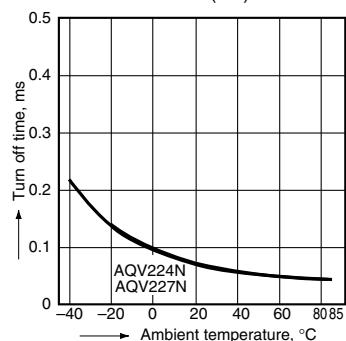


5. LED operate current vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

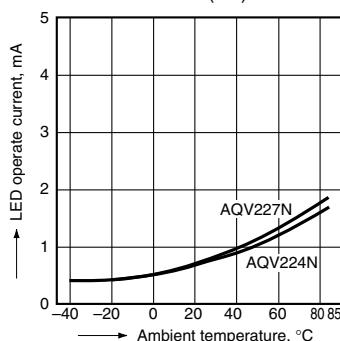


6. LED turn off current vs. ambient temperature characteristics

Sample: AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

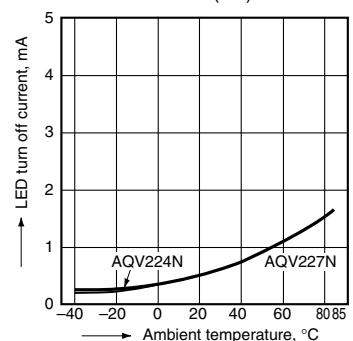


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

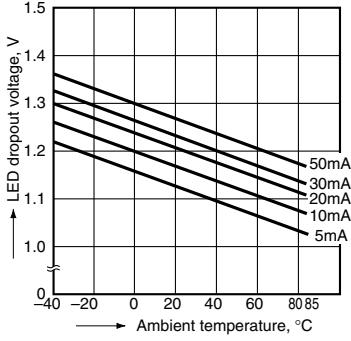


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

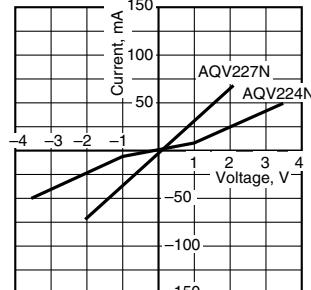

9. Off state leakage current


Sample: AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

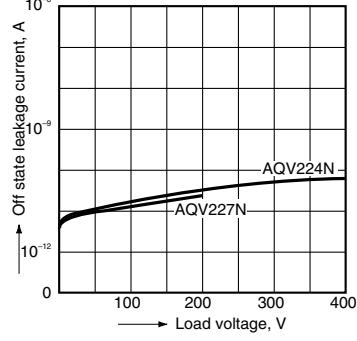

RF 1 Form A Low on-resistance (AQV22ON)


10. Turn on time vs. LED forward current characteristics

Sample: AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

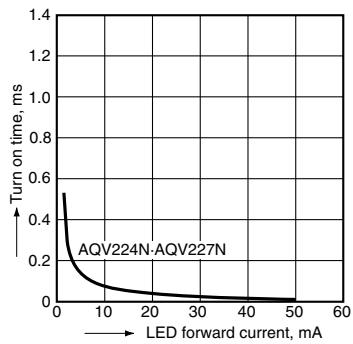


11. Turn off time vs. LED forward current characteristics

Sample: AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

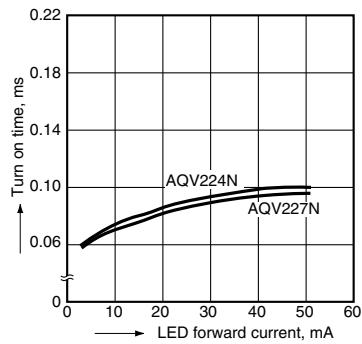


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F

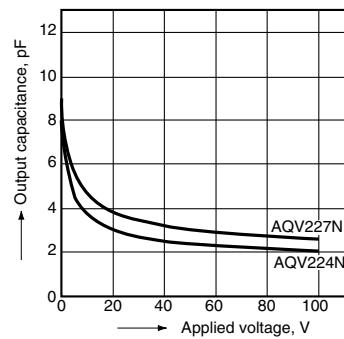

13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

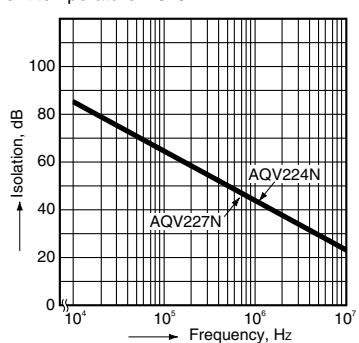

14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

