

## FM10 Multi Level Stainless Steel Float Switch

Ideal for small and medium tank level detection in restrictive spaces, the FM10 liquid level sensor can be mounted externally or internally through 1" or larger NPT holes to sense multiple levels.

### FM10

Stainless steel stems with steel floats to provide corrosion resistance and versatility across a variety of liquid media.

#### FM10-xxxxx - 1" Diameter, Stainless Steel Multi Level Float Switch


This durable design is ideal for corrosion resistant applications in restrictive spaces

Part Number	Switch Type	Max Switching Current	Max Switching Voltage	Max Temp	Max Pressure	Specific Gravity
FM10-XXXXX	50 Watt	0.5 Amps	250 VDC	150° C	250 psig	0.60




## Internal Mounting

(FM10-SMD01 THRU FM10-SMD09)

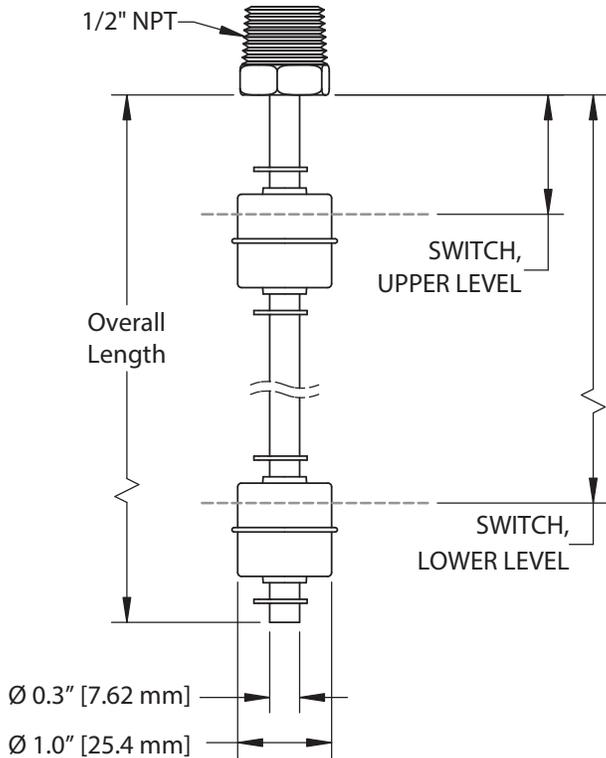

## External Mounting

(FM10-SMD10 THRU FM10-SMD18)

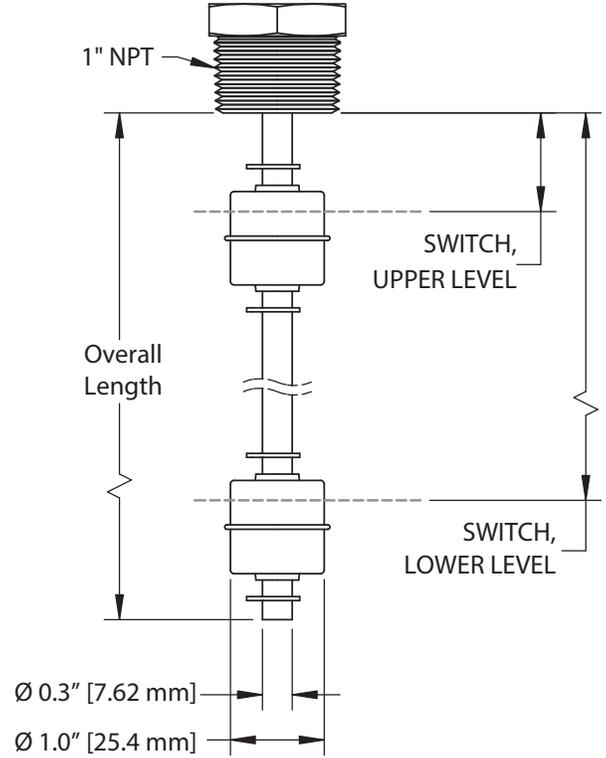


## Internal Mounting

BASE PART NUMBER	OVERALL LENGTH	SWITCH, UPPER LEVEL	SWITCH, LOWER LEVEL
FM10-SMD01	4"	1.25"	2.75"
FM10-SMD02	5"	1.25"	3.75"
FM10-SMD03	6"	1.25"	4.75"
FM10-SMD04	7"	1.25"	5.75"
FM10-SMD05	8"	1.25"	6.75"
FM10-SMD06	9"	1.25"	7.75"
FM10-SMD07	10"	1.25"	8.75"
FM10-SMD08	11"	1.25"	9.75"
FM10-SMD09	12"	1.25"	10.75"


## External Mounting


BASE PART NUMBER	OVERALL LENGTH	SWITCH, UPPER LEVEL	SWITCH, LOWER LEVEL
FM10-SMD10	4"	1.25"	2.75"
FM10-SMD11	5"	1.25"	3.75"
FM10-SMD12	6"	1.25"	4.75"
FM10-SMD13	7"	1.25"	5.75"
FM10-SMD14	8"	1.25"	6.75"
FM10-SMD15	9"	1.25"	7.75"
FM10-SMD16	10"	1.25"	8.75"
FM10-SMD17	11"	1.25"	9.75"
FM10-SMD18	12"	1.25"	10.75"

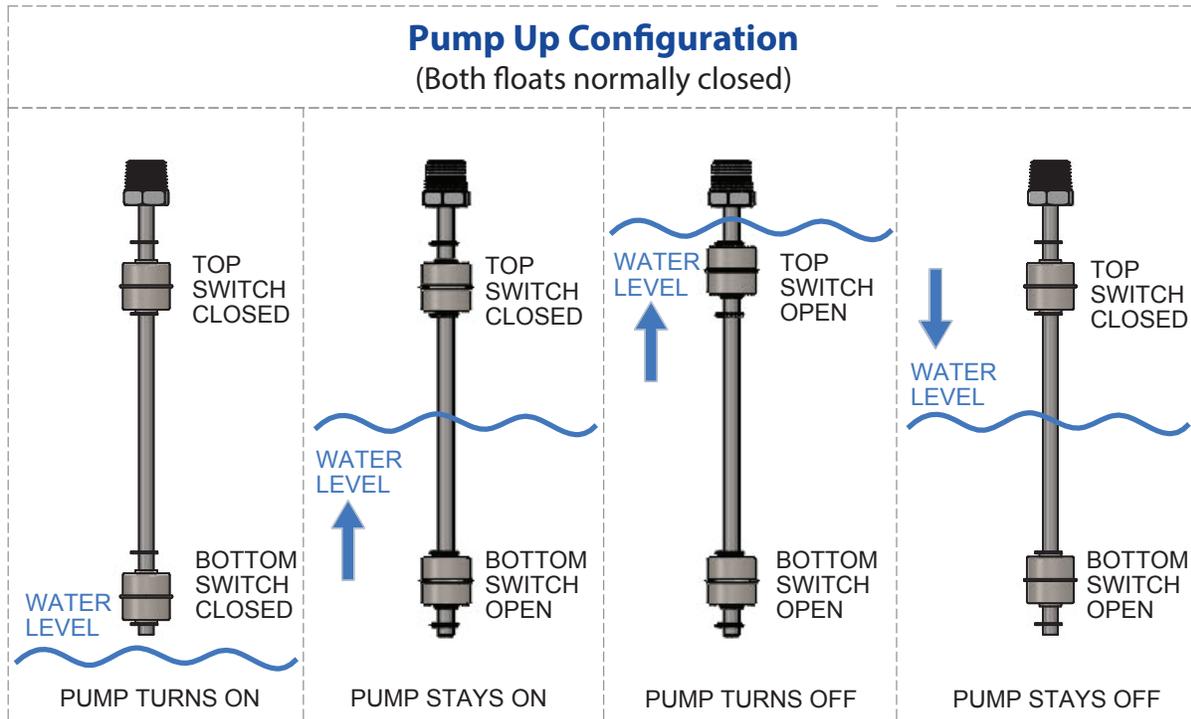

\*NOTE: PUMP UP = TURN PUMP ON WHEN NEAR EMPTY AND TURN PUMP OFF WHEN NEAR FULL.

### Pump Up Relay Controller

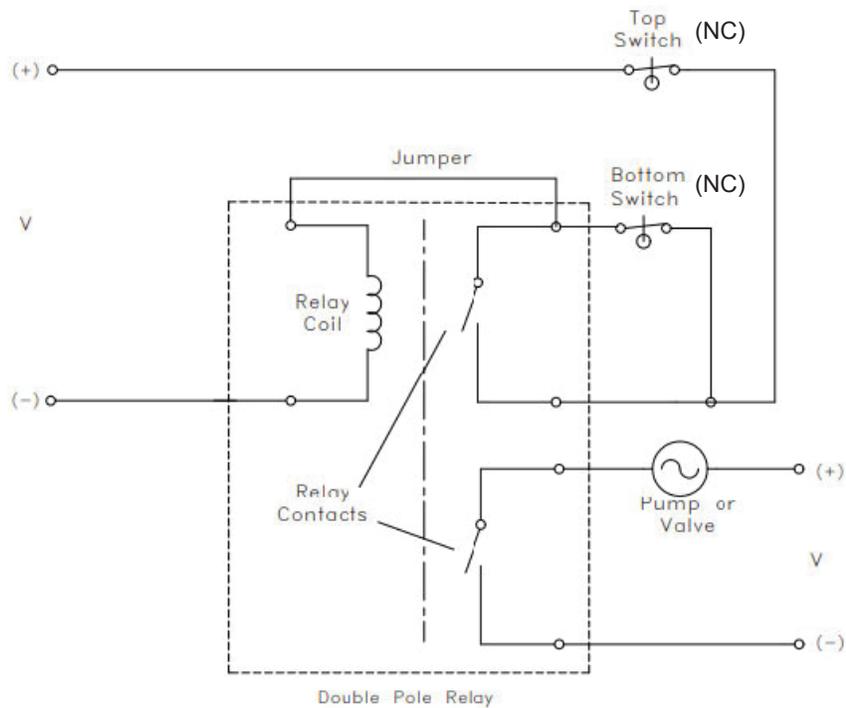

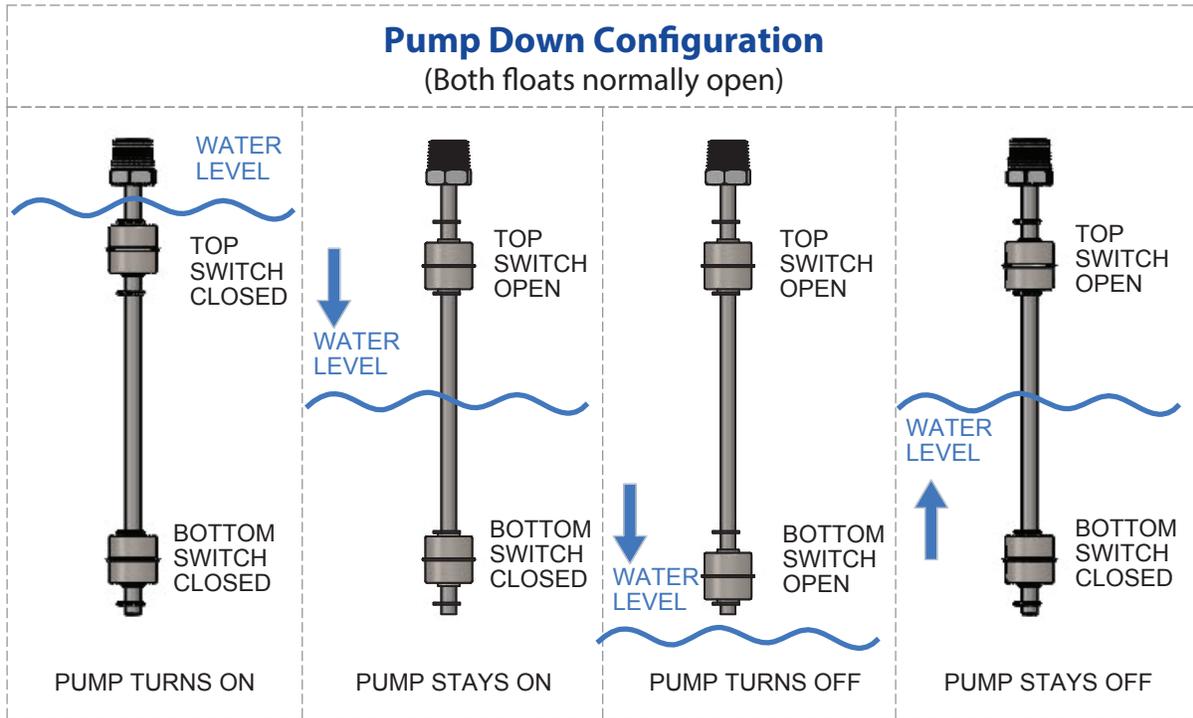

### Pump Down Relay Controller

