SIEMENS

Data sheet

3RT2926-3AB31



Latching block, mechanical, 24 V AC/DC for motor contactors, Size S0

General technical data		
product brand name		SIRIUS
product designation		mechanical latch
size of contactor		S0
protection class IP on the front		IP20
insulation voltage with degree of pollution 3 at AC rated value	V	300
power loss [V·A] of magnet coil at AC typical	V·A	4
power loss [W] of magnet coil at DC typical	W	4
pulse duration for switching off		
• at AC	ms	18 31
• at DC	ms	18 26
ambient temperature		
 during storage 	°C	-50 +80
 during operation 	°C	-25 +60
Auxiliary circuit		
number of NC contacts		
 for auxiliary contacts instantaneous contact 		0
 for auxiliary contacts lagging switching 		0
 for auxiliary contacts 		0
number of NO contacts		
 for auxiliary contacts instantaneous contact 		0
 for auxiliary contacts leading contact 		0
 for auxiliary contacts 		0
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency		
 1 rated value 	Hz	50
2 rated value	Hz	60
control supply voltage 1		
• at DC rated value	V	24
• at AC		
— at 50 Hz rated value	V	24
— at 60 Hz rated value	V	24
operating range factor control supply voltage rated value of magnet coil		0.85 1.1
• at AC at 50 Hz		0.85 1.1
• at AC at 60 Hz		0.85 1.1

● at DC				0.85 1.1				
Installation/ mounting/ dimensions								
fastening method			clip-on					
mounting position			any					
width		mm	22					
height		mm	48.4					
depth		mm	84.3					
Connections/ Termina	als							
type of electrical connection for auxiliary and control circuit				screw-type terminals				
type of connectable	conductor cross-sect	tions						
 for auxiliary con 	itacts							
— solid				2x (0.5 2.5 mm²), 1x 4 mm²				
— finely stran	nded							
	 — with core end processing 			2x (0.5 2.5 mm²), 1x 2.5 mm²				
 at AWG cables for auxiliary contacts 			2x 14, 1x 12					
Certificates/ approvals	S							
certificate of suitability			CE / UL / CSA / CCC					
General Product Approval		EMC	;	Declaration of Conformity				
SP CM	(UL)	EAC		RCM	<u>Miscellaneous</u>	CE EG-Konf.		
Test Certificates		other			Railway			
<u>Special Test</u> <u>Certificate</u>	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Confirmatic</u>	<u>on</u>	DE VDE	Vibration and Shock			

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-3AB31


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-3AB31

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-3AB31

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-3AB31&lang=en

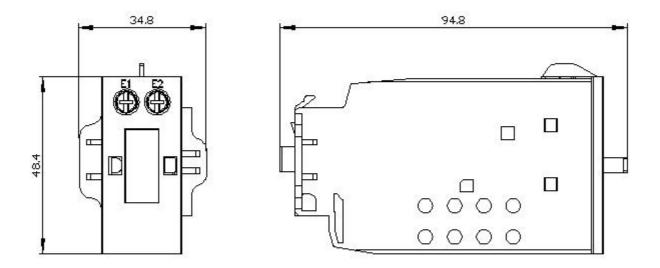

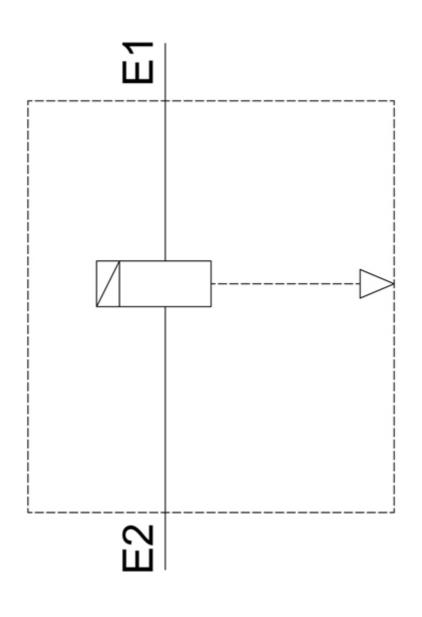

last modified:

5/15/2020 🖸